

(1390 REV. 5-93) US DEPT. OF COMMERCE PATENT & TRADEMARK OFFICE

**TRANSMITTAL LETTER TO THE
UNITED STATES
DESIGNATED/ELECTED OFFICE
(DO/EO/US) CONCERNING A FILING
UNDER 35 U.S.C. 371**

ATTORNEY'S DOCKET NUMBER
110274

U.S. APPLICATION NO.
(if known, sec 37 C.F.R.1.5)

09/890768

INTERNATIONAL APPLICATION NO.
PCT/JP99/03528

INTERNATIONAL FILING DATE
June 30, 1999

PRIORITY DATE CLAIMED
February 4, 1999

TITLE OF INVENTION
PROCESSES FOR PRODUCING ANATASE TITANIUM OXIDE AND TITANIUM OXIDE COATING MATERIAL

APPLICANTS FOR DO/EO/US
Tatsuya IMURA, Seiji TERADA

Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:

1. ☒ This is a **FIRST** submission of items concerning a filing under 35 U.S.C. 371.
2. ☐ This is a **SECOND** or **SUBSEQUENT** submission of items concerning a filing under 35 U.S.C. 371.
3. ☒ This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(1).
4. ☒ A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.
5. ☒ A copy of the International Application as filed (35 U.S.C. 371(c)(2))
 - a. ☐ is transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☒ has been transmitted by the International Bureau.
 - c. ☐ is not required, as the application was filed in the United States Receiving Office (RO/US)
6. ☒ A translation of the International Application into English (35 U.S.C. 371(c)(2)).
7. ☐ Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))
 - a. ☐ are transmitted herewith (required only if not transmitted by the International Bureau).
 - b. ☐ have been transmitted by the International Bureau.
 - c. ☐ have not been made; however, the time limit for making such amendments has NOT expired.
 - d. ☐ have not been made and will not be made.
8. ☐ A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).
9. ☒ An oath or declaration of the inventors (35 U.S.C. 371(c)(4)).
10. ☐ A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371 (c)(5)).

Items 11. to 16. below concern other document(s) or information included:

11. ☒ An Information Disclosure Statement under 37 CFR 1.97 and 1.98.
12. ☒ An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.
13. ☒ A FIRST preliminary amendment.
☐ A SECOND or SUBSEQUENT preliminary amendment.
14. ☐ A substitute specification.
15. ☐ Entitlement to small entity status is hereby asserted.
16. ☐ Other items or information:

U.S. APPLICATION NO. (If known, See 37 C.F.R. 1.55) 09/890768		INTERNATIONAL APPLICATION NO. PCT/JP99/03528		ATTORNEY'S DOCKET NUMBER 110274	
--	--	--	--	---------------------------------	--

17. <input checked="" type="checkbox"/> The following fees are submitted: Basic National fee (37 CFR 1.492(a)(1)-(5)): Search Report has been prepared by the EPO or JPO\$860.00 International preliminary examination fee paid to USPTO (37 CFR 1.482)\$690.00 No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2))\$710.00 Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(2)) paid to USPTO\$1,000.00 International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4)\$ 100.00 ENTER APPROPRIATE BASIC FEE AMOUNT =	CALCULATIONS	PTO USE ONLY																																																						
	\$860.00																																																							
Surcharge of \$130.00 for furnishing the oath or declaration later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 months from the earliest claimed priority date (37 CFR 1.492(e)).	\$																																																							
<table border="1" style="width:100%; border-collapse: collapse;"> <tr> <th style="width:20%;">Claims</th> <th style="width:20%;">Number Filed</th> <th style="width:10%;">Number Extra</th> <th style="width:20%;">Rate</th> <th style="width:10%;"></th> <th style="width:10%;"></th> </tr> <tr> <td>Total Claims</td> <td>19- 20 =</td> <td>0</td> <td>X \$ 18.00</td> <td>\$</td> <td></td> </tr> <tr> <td>Independent Claims</td> <td>5- 3 =</td> <td>2</td> <td>X \$ 80.00</td> <td>\$160.00</td> <td></td> </tr> <tr> <td colspan="3">Multiple dependent claim(s)(if applicable)</td> <td>+ \$270.00</td> <td>\$</td> <td></td> </tr> <tr> <td colspan="4">TOTAL OF ABOVE CALCULATIONS =</td> <td>\$</td> <td></td> </tr> <tr> <td colspan="4">Reduction by 1/2 for filing by small entity, if applicable.</td> <td>-</td> <td>\$</td> </tr> <tr> <td colspan="4">SUBTOTAL =</td> <td>\$1,020.00</td> <td></td> </tr> <tr> <td colspan="4">Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 month from the earliest claimed priority date (37 CFR 1.492(f)).</td> <td>+</td> <td>\$</td> </tr> <tr> <td colspan="4">TOTAL NATIONAL FEE =</td> <td>\$1,020.00</td> <td></td> </tr> </table>	Claims	Number Filed	Number Extra	Rate			Total Claims	19- 20 =	0	X \$ 18.00	\$		Independent Claims	5- 3 =	2	X \$ 80.00	\$160.00		Multiple dependent claim(s)(if applicable)			+ \$270.00	\$		TOTAL OF ABOVE CALCULATIONS =				\$		Reduction by 1/2 for filing by small entity, if applicable.				-	\$	SUBTOTAL =				\$1,020.00		Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 month from the earliest claimed priority date (37 CFR 1.492(f)).				+	\$	TOTAL NATIONAL FEE =				\$1,020.00			
Claims	Number Filed	Number Extra	Rate																																																					
Total Claims	19- 20 =	0	X \$ 18.00	\$																																																				
Independent Claims	5- 3 =	2	X \$ 80.00	\$160.00																																																				
Multiple dependent claim(s)(if applicable)			+ \$270.00	\$																																																				
TOTAL OF ABOVE CALCULATIONS =				\$																																																				
Reduction by 1/2 for filing by small entity, if applicable.				-	\$																																																			
SUBTOTAL =				\$1,020.00																																																				
Processing fee of \$130.00 for furnishing the English translation later than <input type="checkbox"/> 20 <input type="checkbox"/> 30 month from the earliest claimed priority date (37 CFR 1.492(f)).				+	\$																																																			
TOTAL NATIONAL FEE =				\$1,020.00																																																				
	Amount to be refunded	\$																																																						
	Charged	\$																																																						


a. ☒ Check No. 121540 in the amount of \$1,020.00 to cover the above fees is enclosed.

b. ☐ Please charge my Deposit Account No. _____ in the amount of \$_____ to cover the above fees. A duplicate copy of this sheet is enclosed.

c. ☒ The Director is hereby authorized to charge any additional fees which may be required, or credit any overpayment, to Deposit Account No. 15-0461. A duplicate copy of this sheet is enclosed.

NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.

SEND ALL CORRESPONDENCE TO:
 OLIFF & BERRIDGE, PLC
 P.O. Box 19928
 Alexandria, Virginia 22320


 NAME: James A. Oliff
 REGISTRATION NUMBER: 27,075

Date: August 3, 2001

NAME: Joel S. Armstrong
 REGISTRATION NUMBER: 36,430

09/890768

PATENT APPLICATION

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

In re the Application of

Tatsuya IMURA, Seiji TERADA

Application No.: U.S. National Stage of PCT/JP99/03528

Filed: August 3, 2001

Docket No.: 110274

For: PROCESSES FOR PRODUCING ANATASE TITANIUM OXIDE AND TITANIUM
OXIDE COATING MATERIALPRELIMINARY AMENDMENTDirector of the U.S. Patent and Trademark Office
Washington, D. C. 20231

Sir:

Prior to initial examination, please amend the above-identified application as follows:

IN THE CLAIMS:

Please replace claims 3-7, 10-14 and 17-19 as follows:

3. (Amended) The process for producing anatase titanium oxide according to claim 1, wherein the titania sol solution, the titania gel, or the titania sol-gel mixture is heat treated in the temperature range of 80 to 250°C in the closed vessel.

4. (Amended) The process for producing anatase titanium oxide according to claim 1, wherein the titania sol solution, the titania gel, or the titania sol-gel mixture is heat treated in the closed vessel under a pressure of 1.5 to 350 atmA.

5. (Amended) The process for producing anatase titanium oxide according to claim 1, wherein the contents of the closed vessel are heated to evaporate the solvent contained in the titania sol solution, the titania gel, or the titania sol-gel mixture, whereby the

inside of the closed vessel is pressurized by gas generated as a result of the evaporation of the solvent.

6. (Amended) The process for producing anatase titanium oxide according to claim 1, wherein inert gas is introduced into the closed vessel to pressurize the inside of the closed vessel.

7. (Amended) The process for producing anatase titanium oxide according to claim 1, wherein at least one member selected from the group consisting of acidic materials, alkaline materials, organic polymers, and inorganic materials is added to the titania sol solution, the titania gel, or the titania sol-gel mixture.

10. (Amended) The process for producing anatase titanium oxide according to claim 8, wherein the substantially organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture is heat treated in the temperature range of 120 to 270°C in the closed vessel.

11. (Amended) The process for producing anatase titanium oxide according to claim 8, wherein the contents of the closed vessel are heated to evaporate the solvent contained in the substantially organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture, whereby the inside of the closed vessel is pressurized at a pressure of 1.5 to 33 atmA by gas generated as a result of the evaporation of the solvent.

12. (Amended) The process for producing anatase titanium oxide according to claim 8, wherein a titanium alkoxide is provided as a starting material for the production of a substantially organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture and is hydrolyzed in aqueous hydrogen peroxide or aqueous ozone and, at the same time, is dissolved in aqueous hydrogen peroxide or aqueous ozone to produce a substantially organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture.

13. (Amended) The process for producing anatase titanium oxide according to claim 8, wherein at least one member selected from the group consisting of water-soluble metal salts, acidic materials, alkaline materials, organic polymers, inorganic materials, and metal alkoxides other than titanium alkoxides is added to the substantially organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture.

14. (Amended) The process for producing anatase titanium oxide according to claim 8, wherein inert gas is introduced into the closed vessel to pressurize the inside of the closed vessel.

17. (Amended) The process for producing a titanium oxide coating material according to claim 15, wherein the titanium oxide coating material produced by treating the titania sol solution, the titania gel, or the titania sol-gel mixture with ozone gas is further diluted with an organic solvent.

18. (Amended) The process for producing a titanium oxide coating material according to claim 15, wherein the titania sol solution, the titania gel, or the titania sol-gel mixture is treated with ozone gas and at least one member selected from the group consisting of titanium oxide powder, titanium oxide slurry, and a mixture thereof is mixed with the treated product to produce a titanium oxide coating material.


19. (Amended) The process for producing a titanium oxide coating material according to claim 15, wherein at least one member selected from the group consisting of acidic materials, alkaline materials, surfactants, and metal alkoxides other than titanium alkoxides is added to the titania sol solution, the titania gel, or the titania sol-gel mixture.

REMARKS

Claims 1-19 are pending. By this Preliminary Amendment, claims 3-7, 10-14 and 17-19 are amended to eliminate multiple dependencies. Prompt and favorable examination on the merits is respectfully requested.

The attached Appendix includes marked-up copies of each rewritten claim (37 C.F.R. §1.121(c)(1)(ii)).

Respectfully submitted,


James A. Oliff
Registration No. 27,075

Joel A. Armstrong
Registration No. 36,430

JAO:JSA/cmm

Attachment:
Appendix

Date: August 3, 2001

OLIFF & BERRIDGE, PLC
P.O. Box 19928
Alexandria, Virginia 22320
Telephone: (703) 836-6400

DEPOSIT ACCOUNT USE AUTHORIZATION Please grant any extension necessary for entry; Charge any fee due to our Deposit Account No. 15-0461
--

APPENDIX

Changes to Claims:

The following are marked-up versions of the amended claims:

3. ~~(Amended)~~ The process for producing anatase titanium oxide according to claim 1 ~~or 2~~, wherein the titania sol solution, the titania gel, or the titania sol-gel mixture is heat treated in the temperature range of 80 to 250°C in the closed vessel.
4. ~~(Amended)~~ The process for producing anatase titanium oxide according to ~~any one of claims 1 to 3~~, claim 1, wherein the titania sol solution, the titania gel, or the titania sol-gel mixture is heat treated in the closed vessel under a pressure of 1.5 to 350 atmA.
5. ~~(Amended)~~ The process for producing anatase titanium oxide according to ~~any one of claims 1 to 4~~, claim 1, wherein the contents of the closed vessel are heated to evaporate the solvent contained in the titania sol solution, the titania gel, or the titania sol-gel mixture, whereby the inside of the closed vessel is pressurized by gas generated as a result of the evaporation of the solvent.
6. ~~(Amended)~~ The process for producing anatase titanium oxide according to ~~any one of claims 1 to 5~~, claim 1, wherein inert gas is introduced into the closed vessel to pressurize the inside of the closed vessel.
7. ~~(Amended)~~ The process for producing anatase titanium oxide according to ~~any one of claims 1 to 6~~, claim 1, wherein at least one member selected from the group consisting of acidic materials, alkaline materials, organic polymers, and inorganic materials is added to the titania sol solution, the titania gel, or the titania sol-gel mixture.
10. ~~(Amended)~~ The process for producing anatase titanium oxide according to claim 8 ~~or 9~~, wherein the substantially organic solven-free aqueous titania sol solution, titania gel, or titania sol-gel mixture is heat treated in the temperature range of 120 to 270°C in the closed vessel.

11. (Amended) The process for producing anatase titanium oxide according to ~~any one of claims 8 to 10,~~ claim 8, wherein the contents of the closed vessel are heated to evaporate the solvent contained in the substantially organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture, whereby the inside of the closed vessel is pressurized at a pressure of 1.5 to 33 atmA by gas generated as a result of the evaporation of the solvent.

12. (Amended) The process for producing anatase titanium oxide according to ~~any one of claims 8 to 11,~~ claim 8, wherein a titanium alkoxide is provided as a starting material for the production of a substantially organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture and is hydrolyzed in aqueous hydrogen peroxide or aqueous ozone and, at the same time, is dissolved in aqueous hydrogen peroxide or aqueous ozone to produce a substantially organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture.

13. (Amended) The process for producing anatase titanium oxide according to ~~any one of claims 8 to 12,~~ claim 8, wherein at least one member selected from the group consisting of water-soluble metal salts, acidic materials, alkaline materials, organic polymers, inorganic materials, and metal alkoxides other than titanium alkoxides is added to the substantially organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture.

14. (Amended) The process for producing anatase titanium oxide according to ~~any one of claims 8 to 13,~~ claim 8, wherein inert gas is introduced into the closed vessel to pressurize the inside of the closed vessel.

17. (Amended) The process for producing a titanium oxide coating material according to claim 15 ~~or 16~~, wherein the titanium oxide coating material produced by treating

the titania sol solution, the titania gel, or the titania sol-gel mixture with ozone gas is further diluted with an organic solvent.

18. (Amended) The process for producing a titanium oxide coating material according to ~~any one of claims 15 to 17~~, claim 15, wherein the titania sol solution, the titania gel, or the titania sol-gel mixture is treated with ozone gas and at least one member selected from the group consisting of titanium oxide powder, titanium oxide slurry, and a mixture thereof is mixed with the treated product to produce a titanium oxide coating material.

19. (Amended) The process for producing a titanium oxide coating material according to ~~any one of claims 15 to 18~~, claim 15, wherein at least one member selected from the group consisting of acidic materials, alkaline materials, surfactants, and metal alkoxides other than titanium alkoxides is added to the titania sol solution, the titania gel, or the titania sol-gel mixture.




(51) 国際特許分類6 C01G 23/04		A1	(11) 国際公開番号 WO00/46153
		(43) 国際公開日	2000年8月10日(10.08.00)
(21) 国際出願番号 PCT/JP99/03528		(81) 指定国 US, 欧州特許 (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE)	
(22) 国際出願日 1999年6月30日(30.06.99)		添付公開書類 国際調査報告書	
(30) 優先権データ 特願平11/27008 1999年2月4日(04.02.99) JP 特願平11/35358 1999年2月15日(15.02.99) JP			
(71) 出願人 (米国を除くすべての指定国について) 川崎重工業株式会社 (KAWASAKI JUKOGYO KABUSHIKI KAISHA)[JP/JP] 〒650-8670 兵庫県神戸市中央区東川崎町三丁目1番1号 Hyogo, (JP)			
(72) 発明者 ; および (75) 発明者 / 出願人 (米国についてのみ) 井村達哉(IMURA, Tatsuya)[JP/JP] 〒558-0041 大阪府大阪市住吉区南住吉3-9-8 Osaka, (JP) 寺田誠二(TERADA, Seiji)[JP/JP] 〒651-2215 兵庫県神戸市西区北山台3-23-6 Hyogo, (JP)			
(74) 代理人 佐藤一雄, 外(SATO, Kazuo et al.) 〒100-0005 東京都千代田区丸の内三丁目2番3号 富士ビル323号 協和特許法律事務所 Tokyo, (JP)			

(54)Title: **METHOD FOR PRODUCING ANATASE TYPE TITANIUM DIOXIDE AND TITANIUM DIOXIDE COATING MATERIAL**

(54)発明の名称 アナターゼ型酸化チタンおよび酸化チタンコーティング用材料の製造方法

(57) Abstract

A method for producing an anatase type titanium dioxide powder which comprises subjecting a titania sol, a titania gel or a titania sol-gel mixture to a heat treatment and simultaneously to a pressure treatment in a closed vessel, and subsequently drying the resulting product; and a method for producing an anatase type titanium dioxide slurry which comprises subjecting a titania sol, a titania gel or a titania sol-gel mixture to a heat treatment and simultaneously to a pressure treatment in a closed vessel, and subsequently agitating the resulting product to provide a dispersion. This method can be used for producing an anatase type titanium dioxide powder which exhibits high photocatalytic activity and has a large specific surface area, and an anatase type titanium dioxide slurry which has high storage stability and high dispersibility in a process operated at a relatively low temperature and having a small number of steps. A slurry thus obtained can be used as a coating material having photocatalytic activity which can be coated on a material having poor heat resistance.

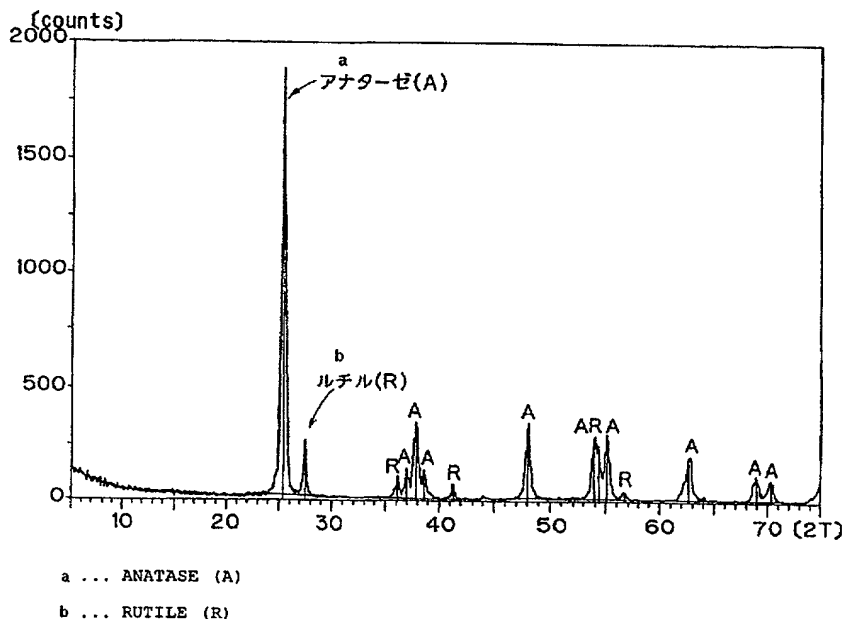

PROCESSES FOR PRODUCING ANATASE TITANIUM OXIDE AND
TITANIUM OXIDE COATING MATERIAL

TECHNICAL FIELD

5 The present invention relates to a process for producing
anatase titanium oxide particularly having high photocatalytic
activity as one of photocatalysts used, for example, as
environment cleaning materials, for example, for the removal of
harmful materials, the deodorisation/decomposition of
10 offensive odor substances, antifouling, and sterilization, and
more particularly to a process for producing anatase titanium
oxide powder having high photocatalytic activity and large
specific surface area, and a process for producing anatase
titanium oxide slurry, containing the anatase titanium oxide
15 powder, with excellent stability and dispersibility.

 The present invention also relates to a process for
producing a coating material of titanium oxide as one of
photocatalysts used, for example, as environment cleaning
materials, for example, for the removal of harmful materials,
20 the deodorisation/decomposition of offensive odor substances,
antifouling, and sterilization. More particularly, the present
invention relates to a process for producing a titanium oxide
coating material which, particularly when anatase titanium oxide
having high photocatalytic activity is coated at a low temperature,
25 the photocatalytic activity can persist for a long period of time,
and, at the same time, can maintain high adhesion strength between
the coating and the member as the substrate for a long period
of time, does not deteriorate the appearance of the member by
virtue of excellent transparency of the coating, and enables the
30 production of a binder for improving adhesion strength.

BACKGROUND ART

 Photocatalysts are materials that, through radicals
(hydroxy radicals, superoxide anions, etc.) generated upon the
35 application of ultraviolet light onto the surface thereto, can
function to perform, for example, the removal of harmful materials
(for example, benzene, dioxin, and volatile organic compounds),

the deodorisation/decomposition of offensive odor substances (substances regulated by the Offensive Odor Control Law), antifouling, and sterilization.

In recent years, an attempt to utilize the above functions by coating the photocatalyst onto the surface of objects has been made. A number of oxides can be utilized as photocatalysts. Among them, titanium oxide is in many cases used as one of the photocatalysts, and, among others, anatase titanium oxide is superior from the viewpoints of both the function and safety.

Specifically, titanium oxide is classified into three crystal forms, i.e., anatase, rutile and brookite forms, and amorphous form. Among them, anatase titanium oxide has the highest photocatalytic activity.

Anatase titanium oxide powder can be produced by a gas phase process and a liquid phase process. For each process, conventional techniques will be described.

Degussa P-25 manufactured by Nippon Aerosil Co., Ltd. is representative anatase titanium oxide produced by the gas phase process. In this process, titanium oxide powder having a specific surface area of $40 \text{ m}^2/\text{g}$ (BET method) can be produced by hydrolysis of titanium chloride in an oxygen atmosphere at a high temperature of 1000°C .

Further, there is also a report such that anatase titanium oxide is produced by a CVD (chemical vapor deposition) process at a controlled furnace temperature of 600 to 800°C (Kagaku Kogaku Ronbunshu (J. Chem. Eng. Japan), Vol. 16, No. 3, 584-587, May 1990).

Sol-gel process, HyCOM (hydrothermal crystallization in Organic Media), and sulfuric acid process have been proposed for the production of anatase titanium oxide by the liquid phase process.

According to the sol-gel process, titanium oxide is produced from an alkoxide in the same manner as in the production of silica, and the sol-gel process should involve two steps, i.e., the step of preparing titanium hydroxide by hydrolysis and the step of sintering wherein titanium hydroxide is polycondensed by heating to give titanium oxide. Further, both the steps are

carried out under the atmospheric pressure (for the sol-gel process, see, for example, "The Science of Sol-Gel Method," 8-15, published in July 1988 by AGNE SHOFU PUBLISHING INC.)

When anatase titanium oxide is prepared by the sol-gel process, the above step of sintering is indispensable, and the heating temperature for sintering should be in the range of 300 to 700°C. The reason why the heat treatment in the specific temperature range is necessary is as follows. When the heat treatment is carried out at a temperature below 300°C, titanium oxide remains unchanged from the amorphous form. On the other hand, when the heat treatment is carried out at a temperature above 700°C, anatase titanium oxide is converted to a crystal form having lower photocatalytic activity, i.e., rutile form.

In HyCOM, moisture contained in gas or water vapor produced from a separate water tank is fed, as water necessary for hydrolysis of an alkoxide, into a solvent with the titanium alkoxide being dissolved therein by the application of pressure (10 kg/cm²G), thereby producing titanium oxide. In this case, the solvent with the alkoxide being dissolved therein and water are placed separately from each other in the apparatus. That is, water is absent in the starting material.

Titanium oxide produced by HyCOM is highly heat-resistant anatase titanium oxide which, for example, even after baking at 900°C, maintains the anatase form and has a specific surface area of 40 m²/g (J. Mater. Sci. Lett., 15, 197 (1996)).

As described in Japanese Patent Laid-Open No. 171408/1995, in the sulfuric acid process, an acidic titanium sol, prepared by heating and hydrolyzing titanium sulfate, is adjusted to pH 7 by the addition of sodium hydroxide, and filtration and washing are then carried out to prepare a crystal. Subsequently, water is added to the resultant titanium oxide wet cake to prepare titanium oxide slurry. The titanium oxide slurry is adjusted to pH 7 by the addition of sodium hydroxide, followed by hydrothermal treatment in an autoclave at 150°C for 3 hr. Thereafter, the hydrothermally treated slurry is adjusted to pH 7 by the addition of nitric acid, and is then filtered. The cake is then washed with water, and is dried (110°C, 3 hr) to prepare titanium oxide.

Next, conventional production processes of titanium oxide-containing liquid and slurry will be described.

Japanese Patent Laid-Open No. 99041/1996 proposes a production process which comprises the steps of: adding
5 polyethylene glycol or ethylene oxide to a titania sol, prepared, for example, from an alkoxide of titanium and an alcohol amine; coating the mixture onto a substrate; and then heating the coated substrate gradually from room temperature to a temperature of 600 to 700°C to prepare a thin film of an anatase titanium oxide.
10 In this publication, there is a description to the effect that the baking temperature is preferably 600 to 700°C. This indicates that the step of sintering is necessary for the production of anatase titanium oxide.

Japanese Patent Laid-Open No. 277147/1996 also proposes
15 a coating material produced by the sol-gel process. In this case, the step of baking at 350°C is provided. Japanese Patent Laid-Open No. 21557/1996 also proposes the use, as a coating material, of a titanium oxide sol, prepared by hydrolysis of a titanyl sulfate, after dilution with water. Also in this case,
20 baking at 300°C in the air is carried out.

Japanese Patent Laid-Open No. 257360/1996 proposes a production process which comprises the steps of: dispersing previously prepared anatase titanium oxide powder (P-25, manufactured by Nippon Aerosil Co., Ltd.) together with finely
25 divided cellulose in water; and adding polyaluminum chloride as a coagulant to prepare a slurry material.

Regarding the dispersion of powdery anatase titanium oxide into water, for example, there is a report such that metatitanic acid is prepared from ilmenite as a starting material by the
30 sulfuric acid process, and nitric acid is added to the metatitanic acid, followed by the dispersion of titanium oxide in the mixture to improve the dispersion and storage stability of the coating material (Kogyo Zairyo Vol. 45, No. 10, p. 48 (1997)).

In the production of anatase titanium oxide powder by the
35 gas phase process, all the above production processes have drawbacks such as the necessity of using a special apparatus in the production of anatase titanium oxide due to the adoption of

high-temperature reaction atmosphere (generally 800°C or above in the case of the gas phase process) and the use of highly reactive titanium chloride as a starting material. In this connection, it should be noted that the above-described production processes of anatase titanium oxide by the gas phase process are a dry process which is utterly different from the production process of anatase titanium oxide by the liquid phase process according to the present invention.

Also in the case where the anatase titanium oxide powder is produced by the sol-gel process, as described above, the step of sintering is indispensable, and, to this end, heat treatment at a temperature of 300°C or above is necessary.

In HyCOM, as described above, highly heat-resistant anatase titanium oxide is obtained. In this process, however, a special apparatus should be disadvantageously used for the preparation of anatase titanium oxide. In HyCOM, a solvent with an alkoxide being dissolved therein and water are placed separately from each other in the apparatus, and, thus, water is absent in the starting material. By contrast, according to the present invention, water is previously added to a titanium alkoxide as the starting material to hydrolyze the titanium alkoxide to titanium hydroxide. Thus, the HyCOM and the production process according to the present invention are utterly different from each other, for example, in procedure.

The production of anatase titanium oxide powder by the sulfuric acid process is disadvantageous in that the number of steps is large and, for example, the operation is very complicate.

For the anatase titanium oxide-containing slurry, in the case of a coating material prepared by hydrolysis, that is, a coating slurry, the step of heat treatment at 300°C or above is necessary to finally prepare anatase titanium oxide. Due to this high temperature, the coating material cannot be coated on base materials having low heat resistance. Therefore, usable base materials are limited.

In the preparation of the coating material, dispersing powdery anatase titanium oxide in a solvent causes the coagulation of titanium oxide particles which makes it impossible to maintain

the activity of the particulate photocatalyst. Further, in the form of the coating material, for example, the dispersion of anatase titanium oxide in the solution is heterogeneous, and, with the elapse of the time, titanium oxide particles
 5 disadvantageously settle at the bottom of the solution. That is, the coating material has a problem of storage stability. As with the above technique, the problem of particle coagulation or the like occurs also in the method where metatitanic acid is prepared from ilmenite as a starting material by the sulfuric acid process,
 10 and nitric acid is added to the metatitanic acid, followed by the dispersion of titanium oxide in the mixture.

Further, a method, wherein a third component in addition to titanium oxide is added for improving the adhesion, and a method, wherein a precoating is prepared, are also known.

15 For example, Japanese Patent Laid-Open No. 131834/1996 describes a method wherein a thermoplastic binder, such as acrylic resin, or a thermosetting resin, such as fluororesin, epoxy resin, or cyloxane resin, is formed on the surface of the substrate.

A method is also proposed wherein PTFE as one of
 20 fluororesins is used as a binder ("Hikarishokubai No Sekai (The world of photocatalysts)," issued in April 1998 by Kogyo Chosakai Publishing Co., Ltd.).

A proposal has also been made wherein photocatalytic decomposition-free silica is precoated on a substrate and,
 25 thereafter, a titanium oxide layer is coated, thereby improving the adhesion strength.

Thus, regarding the binder for ensuring the strength of adhesion to the member, the addition of ceramics, such as silica (SiO_2), or polymers, such as polymethyl methacrylate (PMMA), has
 30 hitherto been made.

However, when the adhesion of anatase titanium oxide onto the surface of the member with high adhesion strength is contemplated, as described in Japanese Patent Laid-Open Nos. 99041-1996 and 277147/1996, there is a problem such that treatment
 35 at a high temperature of 300°C or above is necessary and, thus, titanium oxide cannot be coated onto members having low heat resistance.

The conventional binder used for improving the adhesion of titanium oxide has the following problems.

As described in Japanese Patent Laid-Open No. 131834/1996, when organic matter is mixed, the photocatalyst decomposes the organic matter and thus cannot maintain the adhesion strength. Therefore, there is a limitation on the long-term persistence of the photocatalytic activity. Likewise, in the case of polymers, such as polymethyl methacrylate (PMMA), the decomposition of PMMA takes place by the photocatalytic activity, leading to a limitation on the persistence of adhesion strength.

In the case of silica, although the adhesion strength can be maintained, a separate material is necessary. This deteriorates the photocatalytic activity.

Japanese Patent Laid-Open No. 67516/1998 describes a method which comprises preparing a titanium hydroxide precipitate from a titanium solution and a basic solution, adding thereto aqueous hydrogen peroxide, and then heat treating the mixture at a temperature of 80°C or above. By contrast, the production process according to the present invention is utterly different from this method in that an organic solvent is used, the step of recovering precipitate is not provided, and ozone treatment is carried out at a temperature of about 25°C or below.

Further, in the prior art technique, as described in the above publication, there are two coating steps which render the process complicate.

DISCLOSURE OF THE INVENTION

First invention

An object of the first invention is to provide a process for producing anatase titanium oxide powder wherein a titania sol, a titania gel, or a titania sol-gel mixture is heat treated in a closed vessel to hybridize the effect of pressure, whereby anatase titanium oxide powder having high photocatalytic activity and large specific surface area can be produced at a low heat treatment temperature of 250°C or below via a small number of steps in a simple manner.

Another object of the first invention is to provide a

process for producing anatase titanium oxide slurry wherein anatase titanium oxide produced by heat treatment within a closed vessel under pressure is subjected to, for example, ultrasonic dispersion or stirring in the solvent used in the preparation of a titania sol, a titania gel, or a titania sol-gel mixture, whereby anatase titanium oxide slurry, which is very stable, is free from settling of titanium oxide particles, and can also be coated on the surface of materials having low heat resistance, can be produced at room temperature.

In order to attain the above object, the process for producing anatase titanium oxide according to the first invention comprises the steps of: heat treating a titania sol solution, a titania gel, or a titania sol-gel mixture in a closed vessel under pressure, said titania sol solution, titania gel, or titania sol-gel mixture containing as a solvent an alcohol represented by structural formula $C_nH_{2n+1}OH$; and then drying the treated product to prepare anatase titanium oxide powder.

The process for producing anatase titanium oxide according to the first invention comprises the steps of: heat treating a titania sol solution, a titania gel, or a titania sol-gel mixture in a closed vessel under pressure, said titania sol solution, titania gel, or titania sol-gel mixture containing as a solvent an alcohol represented by structural formula $C_nH_{2n+1}OH$; and then ultrasonically dispersing or stirring the treated product to prepare anatase titanium oxide slurry. As described above, stirring may be ultrasonic dispersion and, in addition, may of course be mechanical agitation or the like.

In these cases, examples of starting materials usable for the production of a titania sol or a titania gel include metal organic compounds, e.g., metal alkoxides and titanium oxalate, and metal inorganic compounds, e.g., titanium nitrate and titanium tetrachloride. Metal alkoxides include, for example, titanium tetramethoxide, titanium tetraethoxide, titanium isopropoxide, and titanium tetrabutoxide.

In the production process according to the present invention, the titania sol solution, the titania gel, or the titania sol-gel mixture is preferably heat treated in a closed

vessel in the temperature range of 80 to 250°C.

As described above, the temperature, at which the contents of the closed vessel are heated, should be 80 to 250°C because the solvent, which has dissolved the starting material, should be evaporated. When the heat treatment temperature is below 80°C, a lot of time is necessary for evaporating the whole solvent and, thus, satisfactory pressure cannot be applied. Further, in this case, the amount of anatase titanium oxide produced is not very large even after treatment for a considerably long period of time while applying pressure, and, thus, the treatment at a temperature below 80°C is not suitable from the practical viewpoint. On the other hand, the treatment at a temperature above 250°C requires special structure and equipment such as closed vessels and sealing materials.

Further, in the production process according to the present invention, the titania sol solution, the titania gel, or the titania sol-gel mixture is preferably treated in a closed vessel at a pressure of 1.5 to 350 atmA, more preferably 5 to 60 atmA.

For the pressure of treatment within the closed vessel, as described above, the lower limit is preferably 1.5 atmA, more preferably 5 atmA, while the upper limit is preferably 350 atmA, more preferably 60 atmA. When the pressure of treatment within the closed vessel is below the above lower limit, the dispersibility of the resultant anatase titanium oxide slurry is deteriorated. On the other hand, when the pressure of treatment within the closed vessel exceeds the above upper limit, extra apparatuses and equipment for the application of pressure should be additionally provided.

Further, in the production process according to the present invention, preferably, the contents of the closed vessel are heated to evaporate the solvent contained in the titania sol solution, the titania gel, or the titania sol-gel mixture, whereby the inside of the closed vessel is pressurized by gas generated as a result of the evaporation of the solvent. In this case, the pressure within the closed vessel can be controlled by the volume and the amount of the solvent within the closed vessel, and this can bring the pressure within the closed vessel to the above

treatment pressure in the above defined range.

Further, the introduction of pressurized inert gas into the closed vessel can also regulate the pressure within the closed vessel.

5 As described above, according to the production process of the present invention, an alcohol having a structure represented by formula $C_nH_{2n+1}OH$ is contained as a solvent in the titania sol solution, the titania gel, or the titania sol-gel mixture.

10 The solvent for dissolving the starting material may be any solvent which can dissolve the titania sol or the titania gel. In particular, an alcohol having a structure represented by formula $C_nH_{2n+1}OH$ is preferably used as the solvent. For example, methanol, ethanol, 1-propanol, isopropyl alcohol, 1-butanol,
15 2-butanol, isobutyl alcohol, tert-butyl alcohol, 1-pentanol, 2-pentanol, and 3-pentanol are preferably used.

Further, according to the production processes of the present invention, preferably, at least one member selected from the group consisting of acidic materials, alkaline materials,
20 organic polymers, and inorganic materials is added to the titania sol solution, the titania gel, or the titania sol-gel mixture.

If necessary, acidic materials, such as hydrochloric acid, nitric acid, and acetic acid, alkaline materials, such as ammonia and amine compounds, inorganic materials, such as silica,
25 polymethacrylic acid resins, fluororesins, aromatic organic polymers and the like may be added to the starting material, such as titania sol.

Second invention

In the first invention, a titania sol, prepared, for
30 example, by adding a minor amount of water to titanium isopropoxide in isopropyl alcohol as an organic solvent, is heat treated in a closed vessel to evaporate isopropyl alcohol and to promote the crystallization to form anatase titanium oxide utilizing the vapor pressure and heat. In this case, the
35 resultant titanium oxide slurry contains a large amount of isopropyl alcohol.

Japanese Patent Laid-Open No. 71418/1997 discloses a

technique wherein a titanium hydroxide precipitate is first prepared from a titanium solution and a basic solution, such as an ammonia solution, and aqueous hydrogen peroxide is then added, followed by heat treatment at 80°C or above to crystallize anatase titanium oxide. In this publication, although autoclaving is disclosed, there is no description on detailed treatment conditions and the like. According to the present invention, for example, a metal alkoxide is used as the starting material, and, when the metal alkoxide is mixed with aqueous hydrogen peroxide, hydrolysis and dissolution are simultaneously carried out without the formation of any precipitate, followed by heat treatment of the reaction solution at a temperature of 120 to 270°C, preferably 150 to 240°C, under hermetically sealed conditions to efficiently crystallize titanium oxide in a short time. Thus, the present invention is substantially different from the technique described in the above publication.

In the first invention wherein a titania sol or the like prepared by using an organic solvent as a solvent is used, coatability onto members having low organic solvent resistance is not always satisfactory. Further, when the organic solvent is used, there are many metal salts insoluble in the organic solvent. Therefore, disadvantageously, suitable metal salts cannot be added to titania sols or the like.

Accordingly, an object of the second invention is to provide production processes of anatase titanium oxide powder and aqueous anatase titanium oxide slurry, wherein a substantially organic solvent-free, aqueous titania sol, titania gel, or titania sol-gel mixture is heat treated in a closed vessel under pressure, whereby anatase titanium oxide powder having high photocatalytic activity and large specific surface area and aqueous anatase titanium oxide slurry can be produced at a low heat treatment temperature of 270°C or below, preferably 240°C or below, without the generation of any organic solvent at the time of drying via a small number of steps in a simple manner.

Another object of the second invention is to provide production processes of powder composed mainly of anatase titanium oxide capable of developing photocatalytic activity and

aqueous titanium oxide slurry containing the same, which involve the step of hydrolyzing an titanium alkoxide with water contained in aqueous hydrogen peroxide or aqueous ozone to produce amorphous titanium oxide and, at the same time, instantaneously dissolving
 5 the produced amorphous titanium oxide in aqueous hydrogen peroxide or aqueous ozone, and the step of heat treating the resultant aqueous titania sol solution, titania gel, or titania sol-gel mixture in a closed vessel under pressure.

In order to attain the above object, the process for
 10 producing anatase titanium oxide according to the second invention comprises the steps of: heat treating an organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture in a closed vessel under pressure; and then drying the treated product to prepare anatase titanium oxide
 15 powder.

Further, the process for producing anatase titanium oxide according to the second invention comprises the steps of: heat treating a substantially organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture in a closed
 20 vessel under pressure; and then stirring or ultrasonically dispersing the treated product to prepare aqueous anatase titanium oxide slurry. As described above, for example, mechanical agitation and ultrasonic dispersion may be used for stirring.

In the production process according to the present invention, the organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture is preferably heat treated in the temperature range of 120 to 270°C, more preferably in the temperature range of 150 to 240°C, in the closed vessel.

As described above, the temperature, at which the contents of the closed vessel are heated, is preferably 120 to 270°C, more preferably 150 to 240°C, because the solvent (water), which has dissolved the starting material, should be vaporized in a closed vessel. When the heating temperature is below the lower limit
 35 of the above range, the vaporization of water is unsatisfactory and, thus, the application of pressure is unsatisfactory. Therefore, in this case, the crystallization to form anatase

titanium oxide cannot be promoted. On the other hand, in the case of heat treatment at a temperature above the upper limit of the above temperature range, the crystallization proceeds to an excessive extent. In this case, titanium oxide having large
5 particle diameters is formed, and, thus, the dispersibility in water is poor.

In the production process according to the present invention, preferably, the contents of the closed vessel are heated to evaporate the solvent contained in the organic
10 solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture, whereby the inside of the closed vessel is pressurized at a pressure of 1.5 to 33 atmA by gas generated as a result of the evaporation of the solvent.

The pressure within the closed vessel can be controlled
15 by the volume and the amount of the solvent within the closed vessel, and this can bring the pressure within the closed vessel to the above defined treatment pressure range. As described above, the treatment pressure should fall within the range of 1.5 to 33 atmA. When the pressure within the closed vessel is
20 below the lower limit of the above pressure range, a lot of time is necessary for crystallization to form anatase titanium oxide. On the other hand, when the pressure within the closed vessel exceeds the upper limit of the above pressure range, special structure and equipment, such as closed vessels and sealing
25 materials, are necessary and, in addition, extra apparatuses and equipment are necessary for the application of pressure.

Further, the introduction of pressurized inert gas into the closed vessel can also regulate the pressure within the closed vessel.

30 In these production processes according to the present invention, preferably, a titanium alkoxide is provided as a starting material for the production of an organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture and is hydrolyzed in aqueous hydrogen peroxide or aqueous
35 ozone and, at the same time, is dissolved in aqueous hydrogen peroxide or aqueous ozone to produce an organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel

mixture.

As described above, for example, titanium alkoxides as metal organic compounds may be used as the starting material for the production of a titania sol or a titania gel. Titanium
 5 alkoxides include, for example, titanium tetramethoxide, titanium tetraethoxide, titanium isopropoxide, titanium n-propoxide, titanium tetra-n-butoxide, titanium tetraisobutoxide, titanium methoxypropoxide, and titanium dichloride diethoxide.

The aqueous solvent for dissolving and hydrolyzing the
 10 starting material may be any solvent so far as the solvent is water containing a peroxide. Particularly preferred are aqueous hydrogen peroxide and aqueous ozone.

Further, in these production processes according to the present invention, preferably, at least one member selected from
 15 the group consisting of water-soluble metal salts, acidic materials, alkaline materials, organic polymers, inorganic materials, and metal alkoxides other than titanium is added to the organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture.

A single water-soluble metal salt component or a plurality of water-soluble metal salt components may be added to the starting material such as titania sol. Metal salts include acetates, nitrates, oxalates, sulfates, and chlorides. Metals
 20 contained in the metal salts include platinum, gold, silver copper, sodium, magnesium, aluminum, potassium, calcium, vanadium, chromium, manganese, cobalt, nickel, zinc, selenium, zirconium, molybdenum, palladium, tin, hafnium, and tungsten.

If necessary, acidic materials, such as hydrochloric acid, nitric acid, and acetic acid, alkaline materials, such as ammonia
 30 and amine compounds, inorganic materials, such as silica, polymethacrylic acid resins, fluororesins, organic polymers, such as aromatic organic polymers, and metal alkoxides other than titanium alkoxide may be added to the starting material, such as titania sol. Other metal alkoxides include alkoxides of
 35 aluminum, antimony, barium, bismuth, boron, calcium, cerium, cesium, chromium, copper, gallium, hafnium, iron, lithium, lutetium, magnesium, molybdenum, niobium, nickel, palladium,

platinum, rhodium, samarium, silicon, silver, tungsten, vanadium, yttrium, zinc, zirconium and the like. Further, metal alkoxides may be those wherein a single or a plurality of metals may be contained in the metal alkoxides.

- 5 This technique is not limited to the production of titanium oxide, and can also be applied to the production of photocatalysts such as zinc oxide.

Third invention

- 10 An object of the third invention is to provide a process for producing a titanium oxide coating material wherein, for example, a liquid prepared by treating a titania sol solution, a titania gel, or a titania sol-gel mixture with ozone gas is used to produce a titanium oxide coating material which can realize coating of titanium oxide having excellent
15 photocatalytic activity at a low temperature, can be coated onto members with high adhesion strength, which can be maintained for a long period of time, and has excellent transparency which does not deteriorate the appearance of members. Another object of the third invention is to provide a process for producing a titanium
20 oxide coating material wherein a liquid prepared by treating a titania sol solution, a titania gel, or a titania sol-gel mixture with ozone gas is mixed with titania powder or titania slurry to produce a binder that can maintain adhesion to materials having low adhesion strength for a long period of time although the
25 photocatalytic activity is high.

- In order to attain the above object, the process for producing a titanium oxide coating material according to the third invention comprises the steps of: providing a titania sol solution, a titania gel, or a titania sol-gel mixture; and treating
30 the titania sol solution, the titania gel, or the titania sol-gel mixture with ozone gas to produce a titanium oxide coating material.

- Further, according to the production process of a titanium oxide coating material according to the present invention, the
35 titania sol solution, the titania gel, or the titania sol-gel mixture may be treated with ozone gas, followed by mixing of the treated sol, gel, or sol-gel mixture with titania powder or

titania slurry (at least one of titanium oxide powder, titanium oxide slurry, and a mixture thereof) to produce a titanium oxide coating material.

In these cases, for example, titanium alkoxides and titanium oxalate as metal organic compounds and titanium nitrate and titanium tetrachloride as metal inorganic compounds may be used as starting materials for the production of titania sol or titania gel. Titanium alkoxides include, for example, titanium tetramethoxide, titanium tetraethoxide, titanium isopropoxide, titanium n-propoxide, titanium tetra-n-butoxide, titanium tetraisobutoxide, titanium methoxypropoxide, and titanium dichloride diethoxide.

In these production processes according to the present invention, water, an organic solvent, or a mixture thereof, preferably, an alcohol may be contained as a solvent in the titania sol solution, the titania gel, or the titania sol-gel mixture.

The solvent for dissolving the starting material may be any organic solvent or water so far as the solvent can dissolve titania sol or titania gel. Organic solvents include alcohols, hydrocarbons, halogenated hydrocarbons, phenols, ethers, esters, and nitrogen compounds. More specific examples of organic solvents include hexane, toluene, benzene, xylene, cyclohexane, carbon tetrachloride, phenol, cresols, diethyl ether, dioxane, acetone, ethyl acetate, propyl acetate, acetonitrile, tetrahydrofuran, and pyridine. In particular, the use of alcohols having a structure represented by formula $C_nH_{2n+1}OH$ is preferred. These alcohols include, for example, methanol, ethanol, 1-propanol, isopropyl alcohol, 1-butanol, 2-butanol, isobutyl alcohol, tert-butyl alcohol, 1-pentanol, 2-pentanol, and 3-pentanol.

In the above production process according to the present invention, the starting material, for a titanium oxide coating material, after ozone treatment may be used after dilution with an organic solvent, preferably an alcohol. The alcohol used for the dilution is preferably an alcohol having a structure represented by formula $C_nH_{2n+1}OH$, particularly preferably isopropyl alcohol. Dilution with an organic solvent other than

alcohols or a mixed solution composed of a plurality of organic solvents is also possible. The dilution of the ozone-treated coating material, for example, with an alcohol is carried out from the viewpoints of improving the concentration of the coating material and the effect of inhibiting the gelation.

Further, in these production processes according to the present invention, at least one member selected from the group consisting of acidic materials, alkaline materials, surfactants, and metal alkoxides other than titanium alkoxide is preferably added to the titania sol solution, the titania gel, or the titania sol-gel mixture.

Thus, if necessary, acidic materials, such as hydrochloric acid, nitric acid, and acetic acid, alkaline materials, such as ammonia and amine compounds, surfactants, and metal alkoxides other than titanium alkoxides may be added to the starting material, such as titania sol.

Other metal alkoxides include alkoxides of aluminum, antimony, barium, bismuth, boron, calcium, cerium, cesium, chromium, copper, gallium, hafnium, iron, lithium, lutetium, magnesium, molybdenum, niobium, nickel, palladium, platinum, rhodium, samarium, silicon, silver, tungsten, vanadium, yttrium, zinc, zirconium and the like. Further, metal alkoxides may be those wherein a single or a plurality of metals may be contained in the metal alkoxides.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a diagram showing the results of the analysis of a crystal structure by X-ray diffractometry (XRD) of titanium oxide (P-25) in an example of the present invention;

Fig. 2 is a diagram showing the results of the analysis of a crystal structure by X-ray diffractometry (XRD) of titanium oxide in Example A1 of the present invention;

Fig. 3 is a diagram showing the results of the analysis of a crystal structure by X-ray diffractometry (XRD) of titanium oxide in Comparative Example A1;

Fig. 4 is a diagram showing the results of the analysis of a crystal structure by X-ray diffractometry (XRD) of titanium

oxide in Comparative Example A1;

Fig. 5 is a diagram showing the results of the analysis of a crystal structure by X-ray diffractometry (XRD) of titanium oxide in Example A2 of the present invention;

5 Fig. 6 is a graph showing the results of a test on the decomposition of acetaldehyde by a coating material prepared in Example A3;

Fig. 7 is a diagram showing the analytical results and analytical data of a crystal structure obtained by X-ray diffractometry (XRD) of titanium oxide in Example B1 of the present invention;

Fig. 8 is a diagram showing the results of the analysis of a crystal structure by X-ray diffractometry (XRD) of titanium oxide in Example B1 of the present invention;

15 Fig. 9 is a graph showing the results of a test on the decomposition of acetaldehyde by a coating material prepared in Example B1;

Fig. 10 is a diagram showing the results of the analysis of a crystal structure by X-ray diffractometry (XRD) of titanium oxide in Example B2 of the present invention;

Fig. 11 is a diagram showing the results of the analysis of a crystal structure by X-ray diffractometry (XRD) of titanium oxide in Example B3 of the present invention;

Fig. 12 is a graph showing the results of a test on the decomposition of acetaldehyde by a coating material prepared in Example C1 of the present invention;

Fig. 13 is a graph showing the results of a test on the decomposition of acetaldehyde by a coating material prepared in Example C2 of the present invention; and

30 Fig. 14 is a graph showing the results of a test on the decomposition of acetaldehyde in Comparative Example C1.

BEST MODE FOR CARRYING OUT THE INVENTION

First invention

35 Embodiments of the first invention will be described. In the embodiments of the first invention, for example, a titania sol is used as a starting material, and an alcohol having a

structure represented by formula $C_nH_{2n+1}OH$ is used as a solvent for dissolving the titania sol. A titania gel or a titania sol-gel mixture may be of course used as a starting material. Further, other solvent may also be of course used so far as the solvent
 5 can dissolve the titania sol or the titania gel.

Starting materials usable for the production of a titania sol include, for example, metal organic compounds, for example, metal alkoxides and titanium oxalate, and metal inorganic compounds, for example, titanium nitrate and titanium
 10 tetrachloride. Metal alkoxides include titanium tetramethoxide, titanium tetraethoxide, titanium isopropoxide, and titanium tetrabutoxide.

Solvents usable for dissolving the starting material or the titania sol include, for example, methanol, ethanol, 1-
 15 propanol, isopropyl alcohol, 1-butanol, 2-butanol, isobutyl alcohol, tert-butyl alcohol, 1-pentanol, 2-pentanol, and 3-pentanol.

A titania sol solution composed of the above starting material (for example, metal alkoxide) and the solvent is prepared.
 20 The titania sol solution is placed in a closed vessel, and is heat treated in the temperature range of 80 to 250°C. In the preparation of the titania sol, if necessary, acidic materials, such as hydrochloric acid, nitric acid, and acetic acid, alkaline materials, such as ammonia and amine compounds, inorganic
 25 materials, such as silica, polymethacrylic acid resins, fluororesins, aromatic organic polymers and the like may be added.

Holding with heating within the closed vessel results in the evaporation of the solvent used in the preparation of the titania sol solution, and solvent gas produced by the evaporation
 30 pressurizes the inside of the closed vessel. The treatment pressure within the closed vessel is regulated so that the lower limit of the pressure is 1.5 atmA, preferably 5 atmA, while the upper limit is 350 atmA, preferably 60 atmA. In this case, the pressure can be controlled by the volume and the amount of the
 35 solvent within the closed vessel. Further, the pressure within the closed vessel can also be regulated to the above pressure range by introducing inert gas, such as nitrogen gas, into the

closed vessel at the time of heat treatment.

A liquid containing anatase titanium oxide is produced via two steps, i.e., the step of preparing a titania sol and the step of heat treatment. At that time, the fine particles of anatase titanium oxide settle at the bottom of the solvent, and the solvent is evaporated and removed at a temperature of about 100°C to produce anatase titanium oxide powder which develops high photocatalytic activity. In this case, the solvent after the treatment can be recovered without substantial loss. The resultant anatase titanium oxide powder has a large specific surface area of 50 to 100 m²/g. The specific surface area may be measured, for example, by the BET method.

Further, the fine particles of anatase titanium oxide partially settle at the bottom of the solvent. Therefore, ultrasonic dispersion can realize the dispersion of titanium oxide particles, which are settling, in the solution to produce anatase titanium oxide slurry which is very stable at room temperature and is free from the settling of titanium oxide particles. Thus, the titanium oxide particles as such can be dispersed in the solvent which has been used in the preparation of the titania sol. Mechanical agitation, ultrasonic dispersion and the like may be used for stirring. The resultant anatase titanium oxide slurry can be coated as a coating material having excellent photocatalytic activity at a temperature of about 100°C.

Second invention

Embodiments of the second invention will be described. For example, an embodiment will be described wherein a titanium alkoxide is used as a starting material for the production of an aqueous titania sol solution and aqueous hydrogen peroxide is used as a solvent for dissolving and hydrolyzing the starting material. However, the starting material and the solvent are not limited to these only. Titanium alkoxides include, for example, titanium tetramethoxide, titanium tetraethoxide, titanium isopropoxide, titanium n-propoxide, titanium tetra-n-butoxide, titanium tetraisobutoxide, titanium methoxypropoxide, and titanium dichloride diethoxide. The solvent may be any solvent

so far as the solvent is water containing a peroxide. Further, preferably, in addition to aqueous hydrogen peroxide, for example, aqueous ozone may be used.

At the outset, the titanium alkoxide is hydrolyzed with
5 water contained in aqueous hydrogen peroxide (for example, concentration 30% by weight) to produce amorphous titanium oxide which is instantaneously dissolved in aqueous hydrogen peroxide to prepare an aqueous titania sol solution. In this case, at the
10 time of the preparation of the titania sol, a single water-soluble metal salt component or a plurality of water-soluble metal salt components may be added. Metal salts include acetates, nitrates, oxalates, sulfates, and chlorides. Metals contained in the metal salts include platinum, gold, silver copper, sodium, magnesium, aluminum, potassium, calcium, vanadium, chromium, manganese,
15 cobalt, nickel, zinc, selenium, zirconium, molybdenum, palladium, tin, hafnium, and tungsten. If necessary, acidic materials, such as hydrochloric acid, nitric acid, and acetic acid, alkaline materials, such as ammonia and amine compounds, inorganic materials, such as silica, polymethacrylic acid resins,
20 fluoro-resins, organic polymers, such as aromatic organic polymers, and metal alkoxides other than titanium alkoxide may also be added. For other metal alkoxides, simultaneous or separate hydrolysis may also be possible in such a manner that a titanium alkoxide is hydrolyzed with water contained in aqueous
25 hydrogen peroxide.

Next, the resultant aqueous titania sol solution is heat treated within a closed vessel to prepare an anatase titanium oxide-containing liquid from which powder composed mainly of anatase titanium oxide capable of developing photocatalytic
30 activity and aqueous titanium oxide slurry containing the same are produced. As described above, the temperature, at which the contents of the closed vessel are heated, is preferably 120 to 270°C, more preferably 150 to 240°C, because the solvent (water), which has dissolved the starting material, should be vaporized
35 in a closed vessel. Holding with heating within the closed vessel results in the evaporation of the solvent used in the preparation of the aqueous titania sol solution, and solvent gas produced

by the evaporation pressurizes the inside of the closed vessel. In this case, the pressure within the closed vessel can be controlled by the volume and the amount of the solvent of the closed vessel. This permits the pressure to be regulated in the
5 above pressure range of 1.5 to 33 atmA. Further, the pressure within the closed vessel can also be regulated to the above pressure range by introducing inert gas, such as nitrogen gas, into the closed vessel at the time of heat treatment.

Anatase titanium oxide may be produced via two steps, i.e.,
10 the step of preparing a titania sol and the step of heat treatment. A heat treatment temperature of 270°C or below, preferably 240°C or below, results in the production of anatase titanium oxide powder and aqueous slurry containing the same.

In this case, when the production of powdery anatase
15 titanium oxide is contemplated, evaporation and removal of water from the anatase titanium oxide-containing liquid at a temperature of about 100°C can realize the production of anatase titanium oxide powder having high photocatalytic activity. Since the liquid to be treated does not contain any organic solvent,
20 any organic solvent vapor is not generated at the time of drying. The resultant anatase titanium oxide powder has a high specific surface area of 50 to 100 m²/g. The specific surface area may be measured, for example, by the BET method.

Further, the fine particles of anatase titanium oxide after
25 the treatment partially settle at the bottom of the solvent, and stirring (ultrasonic dispersion being also possible) in the solvent used in the preparation of the titania sol can realize the production of aqueous anatase titanium oxide slurry which is very stable at room temperature and is free from the settling
30 of titanium oxide particles. Thus, the titanium oxide particles as such can be dispersed in the solvent which has been used in the preparation of the titania sol. The resultant aqueous anatase titanium oxide slurry can be coated as a coating material having excellent photocatalytic activity at a temperature of
35 200°C or below, specifically about 100°C. Since the dispersion is aqueous, coating is possible without the generation of any organic solvent in the step of drying.

Third invention

Embodiments of the third invention will be described. In the embodiments of the third invention, for example, a titania sol is used as a starting material, and an alcohol having a structure represented by formula $C_nH_{2n+1}OH$ is used as a solvent for dissolving the titania sol. A titania gel or a titania sol-gel mixture may be of course used as the starting material. Further, other organic solvent and water may also be of course used so far as the solvent can dissolve the titania sol or the titania gel.

Starting materials usable for the production of a titania sol include, for example, metal organic compounds, for example, titanium alkoxides and titanium oxalate, and metal inorganic compounds, for example, titanium nitrate and titanium tetrachloride. Titanium alkoxides include titanium tetramethoxide, titanium tetraethoxide, titanium isopropoxide, titanium n-propoxide, titanium tetra-n-butoxide, titanium tetraisobutoxide, titanium methoxypropoxide, and titanium dichloride diethoxide.

Solvents usable for dissolving the starting material or the titania sol include, for example, methanol, ethanol, 1-propanol, isopropyl alcohol, 1-butanol, 2-butanol, isobutyl alcohol, tert-butyl alcohol, 1-pentanol, 2-pentanol, and 3-pentanol.

A liquid prepared by treating, with ozone gas, titanium hydroxide prepared by the hydrolysis of, for example, a titanium alkoxide among the above starting materials can be used as or in a titanium oxide coating material which can be coated at a low temperature and, at the same time, has excellent adhesion and transparency.

Methods for the production of ozone gas, which is passed through the titania sol, include a method wherein ozone gas is produced by silent discharge of oxygen gas or clean air, a method wherein dilute sulfuric acid is electrolyzed with water or at a low temperature, a method wherein liquid oxygen is heated, and a method wherein ultraviolet light is applied to air. According to the present invention, any of the above methods may be used.

The temperature of the titania sol, at which ozone gas is passed, may be about 25°C. Alternatively, heating or cooling may be carried out.

If necessary, acidic materials, such as hydrochloric acid, nitric acid, and acetic acid, alkaline materials, such as ammonia and amine compounds, surfactants, and metal alkoxides other than titanium alkoxides may be added to the titania sol. For other metal alkoxides, simultaneous or separate hydrolysis may also be possible in such a manner that a titanium alkoxide is hydrolyzed.

The liquid, which has been treated with ozone, as such may be coated for use as a photocatalyst. Alternatively, the liquid may be mixed with anatase titanium oxide powder and/or slurry with anatase titanium oxide dispersed therein to increase the catalytic activity. Thus, the liquid, which has been treated with ozone, as such may be utilized as a photocatalyst and, in addition, may be mixed with previously prepared anatase titanium oxide powder or slurry to increase the activity.

The anatase titanium oxide slurry, which is separately added to increase the activity, may be produced, for example, by heat treating a titania sol solution, a titania gel, or a titania sol-gel mixture in a closed vessel in the temperature range of 80 to 250°C (preferably at a temperature of 240°C or below). A specific one example of the production process of the anatase titanium oxide slurry is to heat treat a titania sol, prepared by adding a minor amount of water to titanium isopropoxide in isopropyl alcohol, in a closed vessel in the temperature range of 80 to 250°C. The production process of the titania powder and the titania slurry is not limited to any process, and the coating material produced by the production process according to the present invention may be mixed and used with any titania powder, titania slurry or the like.

Further, the coating material can be used as a binder for enhancing fixation strength of photocatalysts other than titanium oxide, for example, ZnO and CdS.

Furthermore, a method may also be used wherein a binder is produced within the slurry by passing ozone gas through anatase

titanium oxide slurry, produced by heat treating a titania sol solution, a titania gel, or a titania sol-gel mixture in a closed vessel in the temperature range of 80 to 250°C (preferably at a temperature of 240°C or below), to treat the anatase titanium oxide slurry with ozone. A specific one example thereof is such that a titania sol prepared by adding a minor amount of water to titanium isopropoxide in isopropyl alcohol is heat treated in a closed vessel in the temperature range of 80 to 250°C to produce anatase titanium oxide slurry which is then treated with ozone, whereby a binder for improving the adhesion strength is produced.

The liquid after ozone treatment may be used after dilution with an organic solvent such as an alcohol. For example, when the dilution with isopropyl alcohol is carried out, titanium oxide coating may be carried out at a low temperature of 110°C or below. The dilution ratio may be regulated according to members to be coated because the coating thickness can be regulated by varying the dilution ratio.

Members coatable with the titanium oxide coating material according to the present invention may be any of inorganic materials, organic materials, and metals. They may be used solely or as a composite of two or more. The coating material can be coated at a low temperature, for example, at 110°C or below, independently of the surface profile of the member. Furthermore, drying by exposure to sunlight may be adopted instead of heat treatment to fix the coating.

Inorganic materials include glasses, earthenwares, cements, ceramics, sands, or fibers formed from inorganic materials. Organic materials include thermoplastic resins, such as polyethylene, ABS, polypropylene, polymethyl methacrylate, and fluororesins, thermosetting resins, such as epoxy resins and polyurethanes, FRP, and rubbers. Metal materials, such as aluminum, iron, and copper, and a metal composite material using them, may be coatable without any limitation with the coating material produced according to the present invention.

Any of brush coating, spray coating, spin coating, dip coating and the like may be used for coating of the coating

material produced according to the production process of the present invention.

EXAMPLES

5 The following examples and comparative examples further illustrate the present invention.

Example A1

10 Titanium isopropoxide (14.96 g) was dissolved in 50 ml of isopropanol to prepare a titanium isopropoxide solution. A previously prepared mixture composed of 2.5 ml of 2 N hydrochloric acid, 3 ml of water, and 94.5 ml of isopropanol was added dropwise at a rate of 10 ml per min for 5 min, that is, in an amount of 50 ml, to the titanium isopropoxide solution. The molar ratio of titanium isopropoxide : water : hydrochloric acid in the
15 titania sol solution thus obtained was 1 : 3 : 0.05.

20 The transparent titania sol (50 g) was placed in a 100-ml vessel, and was held at 240°C for 6 hr under hermetically sealed conditions. At that time, the pressure within the closed vessel was increased to 53 atmA. After the treatment, the resultant white powder was dried at 110°C, and the crystal structure thereof was then analyzed by X-ray diffractometry (XRD). As a result, as shown in Fig. 2, the crystal exhibited the same diffraction peak as P-25 (manufactured by Nippon Aerosil Co., Ltd.) of which the results of XRD analysis are shown in Fig. 1, one of anatase
25 titanium oxides, indicating that anatase titanium oxide was produced.

30 This anatase titanium oxide had a specific surface area of 67 m²/g (BET method). The powder contained titanium oxide at a yield of not less than 98%, and the solvent loss after the heat treatment was 0.3%.

Comparative Example A1

35 The titania sol prepared in Example A1 was held at room temperature under atmospheric pressure without the heat treatment in the closed vessel. As a result, the viscosity of the solution increased with the elapse of time, and, five hr after the initiation of the holding, a transparent gel was formed. Even after further standing, the transparent gel remained unchanged,

and white powder was not formed.

Separately, immediately after the preparation of the titania sol in Example A1, the titania sol was treated and dried at 110°C under atmospheric pressure for 5 hr to prepare white powder. This white powder was analyzed by X-ray diffractometry (XRD). As a result, as shown in Fig. 3, the white powder had an amorphous structure.

Separately, the titania sol prepared in Example A1 was treated at 400°C under atmospheric pressure. As a result, anatase titanium oxide was produced. The results of analysis by XRD are shown in Fig. 4. The powder, however, was slightly grayish due to the presence of the residual organic material.

Example A2

The transparent titania sol (50 g) prepared in Example A1 was placed in a 100-ml vessel, and was treated at 150°C under hermetically sealed conditions for 6 hr. As a result, white powder was produced. As shown in Fig. 5, the analysis of this powder by X-ray diffractometry (XRD) revealed that anatase titanium oxide was produced.

Example A3

A liquid containing fine particles of anatase titanium oxide produced by the heat treatment under hermetically sealed conditions in Example A1 was treated in an ultrasonic washer (high frequency output 65 W) for 10 min to disperse the titanium oxide particles, which had been in the settled state, in the solution. The pH value of the resultant dispersion (slurry) was 4.9. This dispersion of anatase titanium oxide, even when allowed to stand for not less than 20 days, did not cause settling, and the anatase titanium oxide remained very stably dispersed.

The dispersion (slurry) was coated on the inner surface of a one-liter separable flask made of glass, and the coating was dried at 110°C for 30 min. The amount of titanium oxide coated on the inner surface of the separable flask was 0.25 g. The titanium oxide coating within the separable flask was exposed to light emitted from a low-pressure mercury lamp (10 W) to evaluate the decomposition of 500 ppm of acetaldehyde. The results are shown in Fig. 6.

When light from the mercury lamp was not applied to the titanium oxide coating, although the amount of acetaldehyde was reduced by an amount of acetaldehyde adsorbed on titanium oxide present on the inner surface of the flask at the time of injection of acetaldehyde into the flask, the acetaldehyde concentration remained unchanged from that at the time of the injection (corresponding to -30 min to 0 min in Fig. 6). On the other hand, the application of light from the mercury lamp reduced the concentration of acetaldehyde within the flask, and the whole quantity of acetaldehyde disappeared about 40 min after the initiation of the light irradiation. Further, analysis was carried out for carbon dioxide (decomposition product of acetaldehyde) within the flask. As a result, it was found that, simultaneously with the application of light from the mercury lamp, the concentration of carbon dioxide within the flask increased.

The above results show that acetaldehyde was decomposed and removed by anatase titanium oxide having photocatalytic activity.

Conditions for X-ray diffraction and conditions for the measurement of gas concentration in the examples and comparative examples described above are as follows.

(1) Conditions for X-ray diffraction

X-ray apparatus: Model PW 3050 manufactured by Phillips Japan, Ltd.

X-ray source: Cu K α radiation

Output: tube voltage 40 kV, tube current 30 mA

Scanning: $\theta/2\theta$ scan

Scanning range (diffraction angle 2θ): 5° to 75°

Scanning speed: 0.05° ($2\theta/\text{sec}$)

Detector: proportional counter

(2) Conditions for measurement of gas concentration

Acetaldehyde: GC-FID (hydrogen flame ionization detector) type (Shimadzu GC-14B)

Column: DB-WAX (diameter $0.25\ \mu\text{m}$, length 30 m)

Flow rate of carrier gas: 41 ml/min (He)

Split ratio: 1/40 (makeup gas: He)

Column temp.: 100°C

Injection temp.: 230°C

Detector temp.: 250°C

CO₂: GC-FID (hydrogen flame ionization detector) type
5 (Shimadzu GC-14A)

Pretreatment at 400°C in methanizer (MTN-1)

Column: Porapak Q

Flow rate of carrier gas: 50 ml/min (hydrogen)

Column temp.: 50°C

10 Injection temp.: 100°C

Detector temp.: 100°C

The first invention having the above constitution has the following effects.

(1) Heat treatment of a titania sol, a titania gel, or a
15 titania sol-gel mixture in a closed vessel under pressure can realize the production of anatase titanium oxide powder having high photocatalytic activity and slurry containing the same at a low heat treatment temperature of 250°C or below.

(2) Anatase titanium oxide can be produced through two
20 steps, the step of preparing a starting material and the step of heat treatment. That is, the production process involves a small number of steps and is simple.

(3) When the production of powdery titanium oxide is contemplated, what is required after the heat treatment is only
25 to evaporate and remove the solvent at a temperature of about 100°C. The resultant anatase titanium oxide powder has a specific surface area of 50 to 100 m²/g, that is, has a high specific surface area.

(4) The solvent used in the dissolution of the starting
30 material of titanium oxide can be recovered without any loss after the heat treatment, and, in addition, can be used as a solvent for dispersion of the resultant anatase titanium oxide particles to produce a slurry.

(5) Anatase titanium oxide after the heat treatment is
35 present as fine particles at the bottom of the solvent. In this case, ultrasonic dispersion treatment (mechanical agitation being also possible) in the solvent used in the preparation of

the starting material can realize the production at room temperature of anatase titanium oxide slurry which is very stable and is free from settling of titanium oxide particles.

- (6) The resultant anatase titanium oxide slurry has very high storage stability and dispersibility, can be coated, at a temperature of about 100°C, as a coating material having excellent photocatalytic activity, and can also be coated on the surface of materials having low heat resistance. Further, sunlight may be used as alternative drying means.

10 Example B1

- Titanium isopropoxide (9.36 g) was placed in 50 ml of aqueous hydrogen peroxide (concentration 30 wt%) to perform hydrolysis. Ten min after the initiation of the hydrolysis, 450 ml of aqueous hydrogen peroxide was further added, and the system was allowed to stand for 3 hr to perform hydrolysis. Thus, a liquid of a transparent yellow titania sol was prepared.

- This sol was dried at 110°C for 30 min to prepare yellow powder of which the crystal structure was then analyzed by X-ray diffractometry (XRD). As a result, as shown in Fig. 7, the powder contained four types of titanium oxide, i.e., anatase, rutile, brookite, and amorphous. The content of hydrogen peroxide contained in the yellow sol was 0.004% by weight.

- On the other hand, 50 g of the transparent yellow titania sol was placed in a 100-ml vessel, and was held at 240°C for 3 hr under hermetically sealed conditions. At that time, the pressure within the closed vessel rose to 33 atmA. The content of hydrogen peroxide contained in the slurry after the treatment was 0% by weight.

- White powder obtained after the treatment was dried at 110°C for 30 min, and the crystal structure thereof was then analyzed by X-ray diffractometry (XRD). As a result, as shown in Fig. 8, in the resultant crystal, the amorphous titanium oxide has been converted to anatase titanium oxide, and titanium oxide composed mainly of anatase titanium oxide was obtained. The powder contained titanium oxide at a yield of not less than 98%, and the solvent loss after the heat treatment was 0.3%.

The dispersion after the treatment was coated on the inner

surface of a one-liter separable flask made of glass, and the coating was dried at 110°C for 30 min. The amount of titanium oxide coated on the inner surface of the separable flask was 0.25 g. The titanium oxide coating within the separable flask was
5 exposed to light emitted from a low-pressure mercury lamp (10 W) to evaluate the decomposition of 500 ppm of acetaldehyde. The results are shown in Fig. 9.

When light from the mercury lamp was not applied to the titanium oxide coating, 30 min after the injection, the
10 concentration of acetaldehyde contained in the gas within the flask was lowered to 200 ppm (corresponding to -30 min to 0 min in Fig. 9). This reduction corresponds to an amount of acetaldehyde adsorbed on titanium oxide present on the inner
15 surface of the flask at the time of injection of gas into the flask. On the other hand, the application of light from the mercury lamp reduced the concentration of acetaldehyde in the gas within the flask, and the whole quantity of acetaldehyde disappeared about 15 min after the initiation of the light
20 irradiation. Further, analysis was carried out for carbon dioxide (decomposition product of acetaldehyde) within the flask. As a result, it was found that, although the evolution of carbon dioxide was not observed before the application of light from the mercury lamp, simultaneously with the application of light from the mercury lamp, the concentration of carbon dioxide within
25 the flask increased.

The above results show that acetaldehyde was decomposed and removed by anatase titanium oxide having photocatalytic activity.

Example B2

30 The transparent yellow titania sol (50 g) prepared in Example B1 was placed in a 100-ml vessel, and was treated at 120°C under hermetically sealed conditions for 3 hr. At that time, the pressure within the closed vessel rose to 1.5 atmA. As a result, white powder was produced. As shown in Fig. 10, the analysis of
35 this powder by X-ray diffractometry (XRD) revealed that the powder was composed mainly of anatase titanium oxide.

Example B3

The transparent yellow titania sol (50 g) prepared in Example B1 was placed in a 100-ml vessel, and was treated at 200°C under hermetically sealed conditions for 3 hr. At that time, the pressure within the closed vessel rose to 16.4 atmA. As a result, white powder was produced. As shown in Fig. 11, the analysis of this powder by X-ray diffractometry (XRD) revealed that the powder was composed mainly of anatase titanium oxide.

Conditions for X-ray diffraction and conditions for the measurement of gas concentration in the examples described above are as follows.

(1) Conditions for X-ray diffraction

X-ray apparatus: RINT 2500 manufactured by Rigaku Industrial Corporation

X-ray source: Cu K α radiation
 Output: tube voltage 40 kV, tube current 200 mA
 Scanning: $\theta/2\theta$ scan
 Scanning range (diffraction angle 2θ): 5° to 75°
 Scanning speed: 0.05° (2 θ /sec)
 Detector: scintillation counter

(2) Conditions for measurement of gas concentration

Acetaldehyde: GC-FID (hydrogen flame ionization detector) type (Shimadzu GC-14B)

Column: DB-WAX (diameter 0.25 μ m, length 30 m)
 Flow rate of carrier gas: 41 ml/min (He)
 Split ratio: 1/40 (makeup gas: He)
 Column temp.: 100°C
 Injection temp.: 230°C
 Detector temp.: 250°C

CO₂: GC-FID (hydrogen flame ionization detector) type (Shimadzu GC-14A)

Pretreatment at 400°C in methanizer (MTN-1)
 Column: Porapak Q
 Flow rate of carrier gas: 50 ml/min (hydrogen)
 Column temp.: 50°C
 Injection temp.: 100°C
 Detector temp.: 100°C

The second invention having the above constitution has the following effects.

(1) The aqueous titania sol, titania gel, or titania sol-gel mixture prepared by the treatment according to the present invention contains only titanium oxide and water, and does not contain any organic solvent, and thus can be coated without generating any organic solvent in the step of drying. Further, coating onto members having low organic solvent resistance is also possible.

(2) Anatase titanium oxide powder having high photocatalytic activity and aqueous slurry containing the same can be produced at a low heat treatment temperature of 270°C or below, preferably 240°C or below.

(3) Anatase titanium oxide can be produced through two steps, the step of preparing a starting material and the step of heat treatment. That is, the production process involves a small number of steps and is simple.

(4) When the production of powdery titanium oxide is contemplated, what is required after the heat treatment is only to evaporate and remove water at a temperature of about 100°C. Also in this case, no organic solvent is generated.

(5) Anatase titanium oxide after the treatment is present as fine particles at the bottom of the solvent. In this case, stirring (ultrasonic dispersion being also possible) in the solvent (water) used in the preparation of the starting material can realize the production at room temperature of aqueous anatase titanium oxide slurry which is very stable and is free from settling of titanium oxide particles.

(6) The resultant aqueous anatase titanium oxide slurry has very high storage stability and dispersibility, can be coated, at a temperature of about 100°C, as a coating material having excellent photocatalytic activity, and can also be coated on the surface of materials having low heat resistance.

(7) Since the titania sol or the like produced by the treatment according to the present invention is aqueous, the addition of a suitable metal salt is also possible.

Example C1

Titanium isopropoxide (14.96 g) was dissolved in 50 ml of isopropanol to prepare a titanium isopropoxide solution. A previously prepared mixture composed of 2.5 ml of 2 N hydrochloric acid, 3 ml of water, and 94.5 ml of isopropanol was added dropwise at a rate of 10 ml per min for 5 min, that is, in an amount of 50 ml, to the titanium isopropoxide solution. The molar ratio of titanium isopropoxide : water : hydrochloric acid in the titania sol solution thus obtained was 1 : 3 : 0.05.

The transparent titania sol (110 g) thus obtained was placed in a 250-ml vessel, and ozone (amount of ozone generated 180 mg/Nl, flow rate of oxygen 40 Nml/min) was passed through the vessel at 25°C for 60 min. 5 g of the liquid after ozone passage was diluted with 35 g (weight ratio = 1 : 7) of isopropanol.

This liquid was coated on the surface of a glass substrate, and the coating was dried at 110°C for 30 min. The dried coating had a pencil hardness of 6H or more, and, when subjected to a pressure-sensitive adhesive tape test wherein a pressure-sensitive adhesive tape was applied and then separated, did not cause the separation of the coating. Further, the transparency of the glass was also very good.

The above coating material was brush coated on the inner surface of a one-liter separable flask made of glass, and the coating was dried at 110°C for 30 min. The amount of titanium oxide coated on the inner surface of the separable flask was 0.02 g. The titanium oxide coating within the separable flask was exposed to light emitted from a low-pressure mercury lamp (10 W) to evaluate the decomposition of 500 ppm of acetaldehyde. The results are shown in Fig. 12.

When light from the mercury lamp was not applied to the titanium oxide coating, upon injection of acetaldehyde into the flask, the adsorption of acetaldehyde onto titanium oxide adhered on the inner surface of the flask caused a reduction in acetaldehyde concentration only by about 10%. Thereafter, however, the acetaldehyde concentration remained unchanged (corresponding to -30 min to 0 min in Fig. 12). On the other hand, the application of light from the mercury lamp reduced the

concentration of acetaldehyde in a gas atmosphere within the flask, and the whole quantity of acetaldehyde disappeared about 50 min after the initiation of the light irradiation. Further, analysis was carried out for carbon dioxide (decomposition product of acetaldehyde) within the flask. As a result, it was found that, simultaneously with the application of light from the mercury lamp, the concentration of carbon dioxide within the flask increased.

The above results show that acetaldehyde was decomposed and removed by the photocatalyst.

Example C2

The transparent titania sol (110 g) prepared in the process described in Example C1 was placed in a 250-ml vessel, and ozone (amount of ozone generated 180 mg/Nl, flow rate of oxygen 40 Nml/min) was passed through the vessel at 25°C for 60 min. 5 g of the liquid after ozone passage was diluted with 35 g (weight ratio = 1 : 7) of isopropanol, and 0.5 g of anatase titanium oxide slurry produced by treating the transparent titania sol at 240°C for 3 hr under hermetically sealed conditions was added to prepare a titanium oxide coating material.

This coating material was coated on the surface of a glass substrate, and the coating was dried at 110°C for 30 min. The dried coating had a pencil hardness of 6H or more, and, when subjected to a pressure-sensitive adhesive tape test wherein a pressure-sensitive adhesive tape was applied and then separated, did not cause the separation of the coating. Further, the transparency of the glass was also very good.

The above coating material was brush coated on the inner surface of a one-liter separable flask made of glass, and the coating was dried at 110°C for 30 min. The amount of titanium oxide coated on the inner surface of the separable flask was 0.04 g. In the same manner as in Example C1, the titanium oxide coating within the separable flask was exposed to light emitted from a low-pressure mercury lamp (10 W) to evaluate the decomposition of 500 ppm of acetaldehyde. The results are shown in Fig. 13.

When light from the mercury lamp was not applied to the titanium oxide coating, upon injection of acetaldehyde into the

flask, the adsorption of acetaldehyde onto titanium oxide adhered on the inner surface of the flask caused a reduction in acetaldehyde concentration only by about 20%. Thereafter, however, the acetaldehyde concentration remained unchanged (corresponding to -30 min to 0 min in Fig. 13). On the other hand, the application of light from the mercury lamp reduced the concentration of acetaldehyde in the flask, and the whole quantity of acetaldehyde disappeared about 40 min after the initiation of the light irradiation. Further, analysis was carried out for carbon dioxide within the flask. As a result, it was found that, simultaneously with the application of light from the mercury lamp, the concentration of carbon dioxide within the flask increased.

The above results show that acetaldehyde was decomposed and removed by the photocatalyst having increased activity.

Example C3

The transparent titania sol (110 g) prepared in the process described in Example C1 was placed in a 250-ml vessel, and ozone (amount of ozone generated 180 mg/Nl, flow rate of oxygen 40 Nml/min) was passed through the vessel at 25°C for 60 min. 5 g of the liquid after ozone passage was diluted with 35 g (weight ratio = 1 : 7) of isopropanol, and 0.5 g of anatase titanium oxide powder (P-25, manufactured by Nippon Aerosil Co., Ltd.) was added to prepare a titanium oxide coating material.

This coating material was coated on the surface of a glass substrate, and the coating was dried at 110°C for 30 min. The dried coating had a pencil hardness of 6H or more, and, when subjected to a pressure-sensitive adhesive tape test wherein a pressure-sensitive adhesive tape was applied and then separated, did not cause the separation of the coating. Further, the transparency of the glass was also very good.

The above coating material was brush coated on the inner surface of a one-liter separable flask made of glass, and the coating was dried at 110°C for 30 min. The amount of titanium oxide coated on the inner surface of the separable flask was 0.04 g. In the same manner as in Example C1, the titanium oxide coating within the separable flask was exposed to light emitted from a

low-pressure mercury lamp (10 W) to evaluate the decomposition of 500 ppm of acetaldehyde. As a result, acetaldehyde within the flask was entirely decomposed into carbon dioxide by the application of light from the mercury lamp.

- 5 The above results show that acetaldehyde was decomposed and removed by the photocatalyst having increased activity.

Comparative Example C1

- 10 Light emitted from a low-pressure mercury lamp (10 W) was applied to the inside of a one-liter separable flask made of glass to evaluate the decomposition of 500 ppm of acetaldehyde. The results are shown in Fig. 14.

- 15 Upon the application of light from the mercury lamp, only a reduction in acetaldehyde by the adsorption of acetaldehyde onto the inner surface of the flask took place, and carbon dioxide as a decomposition product of acetaldehyde was not evolved.

 The third invention having the above constitution has the following effects.

- 20 (1) Titanium oxide having excellent photocatalytic activity can be coated onto members with high adhesion strength, and the high adhesion strength can be maintained. In addition, the photocatalytic activity can persist for a long period of time.

- 25 (2) The titanium oxide coating material produced by the production process according to the present invention can be coated at a low temperature, and can also be coated on the surface of materials having low heat resistance. For example, when isopropyl alcohol is used as a diluent or a solvent, titanium oxide coating at a low temperature of 110°C or below can be realized.

- 30 (3) The material after ozone treatment as such can be utilized as a photocatalyst. In addition, when a previously prepared photocatalyst, for example, anatase titanium oxide powder or anatase titanium oxide slurry is separately added, the catalytic activity can be increased.

- 35 (4) The titanium oxide coating material produced by the production process according to the present invention is highly transparent, and thus does not deteriorate the appearance of members to be coated.

(5) In a process wherein a titanium oxide coating material is produced and coated, there is no need to provide, for example, the step of recovering precipitates of titanium hydroxide, and only ozone treatment is carried out. Thus, the process is simple.

CLAIMS

1. A process for producing anatase titanium oxide, comprising the steps of:

heat treating a titania sol solution, a titania gel, or a titania sol-gel mixture in a closed vessel under pressure, said titania sol solution, titania gel, or titania sol-gel mixture containing as a solvent an alcohol having a structure represented by formula $C_nH_{2n+1}OH$; and

then drying the treated product to prepare anatase titanium oxide powder.

2. A process for producing anatase titanium oxide, comprising the steps of:

heat treating a titania sol solution, a titania gel, or a titania sol-gel mixture in a closed vessel under pressure, said titania sol solution, titania gel, or titania sol-gel mixture containing as a solvent an alcohol having a structure represented by formula $C_nH_{2n+1}OH$; and

then ultrasonically dispersing or stirring the treated product to prepare anatase titanium oxide slurry.

3. The process for producing anatase titanium oxide according to claim 1 or 2, wherein the titania sol solution, the titania gel, or the titania sol-gel mixture is heat treated in the temperature range of 80 to 250°C in the closed vessel.

4. The process for producing anatase titanium oxide according to any one of claims 1 to 3, wherein the titania sol solution, the titania gel, or the titania sol-gel mixture is heat treated in the closed vessel under a pressure of 1.5 to 350 atmA.

5. The process for producing anatase titanium oxide according to any one of claims 1 to 4, wherein the contents of the closed vessel are heated to evaporate the solvent contained in the titania sol solution, the titania gel, or the titania sol-gel mixture, whereby the inside of the closed vessel is pressurized by gas generated as a result of the evaporation of the solvent.

6. The process for producing anatase titanium oxide according to any one of claims 1 to 5, wherein inert gas is

introduced into the closed vessel to pressurize the inside of the closed vessel.

7. The process for producing anatase titanium oxide according to any one of claims 1 to 6, wherein at least one member selected from the group consisting of acidic materials, alkaline materials, organic polymers, and inorganic materials is added to the titania sol solution, the titania gel, or the titania sol-gel mixture.

8. A process for producing anatase titanium oxide, comprising the steps of:

heat treating a substantially organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture in a closed vessel under pressure; and

then drying the treated product to prepare anatase titanium oxide powder.

9. A process for producing anatase titanium oxide, comprising the steps of:

heat treating a substantially organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture in a closed vessel under pressure; and

then stirring or ultrasonically dispersing the treated product to prepare aqueous anatase titanium oxide slurry.

10. The process for producing anatase titanium oxide according to claim 8 or 9, wherein the substantially organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture is heat treated in the temperature range of 120 to 270°C in the closed vessel.

11. The process for producing anatase titanium oxide according to any one of claims 8 to 10, wherein the contents of the closed vessel are heated to evaporate the solvent contained in the substantially organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture, whereby the inside of the closed vessel is pressurized at a pressure of 1.5 to 33 atmA by gas generated as a result of the evaporation of the solvent.

12. The process for producing anatase titanium oxide according to any one of claims 8 to 11, wherein a titanium alkoxide

is provided as a starting material for the production of a substantially organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture and is hydrolyzed in aqueous hydrogen peroxide or aqueous ozone and, at the same time, is dissolved in aqueous hydrogen peroxide or aqueous ozone to produce a substantially organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture.

13. The process for producing anatase titanium oxide according to any one of claims 8 to 12, wherein at least one member selected from the group consisting of water-soluble metal salts, acidic materials, alkaline materials, organic polymers, inorganic materials, and metal alkoxides other than titanium alkoxides is added to the substantially organic solvent-free aqueous titania sol solution, titania gel, or titania sol-gel mixture.

14. The process for producing anatase titanium oxide according to any one of claims 8 to 13, wherein inert gas is introduced into the closed vessel to pressurize the inside of the closed vessel.

15. A process for producing a titanium oxide coating material, comprising the steps of:

providing a titania sol solution, a titania gel, or a titania sol-gel mixture; and

treating the titania sol solution, the titania gel, or the titania sol-gel mixture with ozone gas to produce a titanium oxide coating material.

16. The process for producing a titanium oxide coating material according to claim 15, wherein water, an organic solvent, or a mixture thereof is incorporated as a solvent into the titania sol solution, the titania gel, or the titania sol-gel mixture.

17. The process for producing a titanium oxide coating material according to claim 15 or 16, wherein the titanium oxide coating material produced by treating the titania sol solution, the titania gel, or the titania sol-gel mixture with ozone gas is further diluted with an organic solvent.

18. The process for producing a titanium oxide coating material according to any one of claims 15 to 17, wherein the

titania sol solution, the titania gel, or the titania sol-gel mixture is treated with ozone gas and at least one member selected from the group consisting of titanium oxide powder, titanium oxide slurry, and a mixture thereof is mixed with the treated product to produce a titanium oxide coating material.

19. The process for producing a titanium oxide coating material according to any one of claims 15 to 18, wherein at least one member selected from the group consisting of acidic materials, alkaline materials, surfactants, and metal alkoxides other than titanium alkoxides is added to the titania sol solution, the titania gel, or the titania sol-gel mixture.

ABSTRACT

Production processes are provided which can produce, at a relatively low temperature and in a reduced number of steps, anatase titanium oxide powder having high photocatalytic activity and large specific surface area and anatase titanium oxide slurry having high storage stability and dispersibility. The slurry thus obtained can also be coated, as a coating material having photocatalytic activity, on materials having low heat resistance.

In the production process of anatase titanium oxide powder according to the present invention, a titania sol solution, a titania gel, or a titania sol-gel mixture is heat treated in a closed vessel under pressure, and the treated product is then dried to produce anatase titanium oxide powder. In the production process of anatase titanium oxide slurry according to the present invention, a titania sol solution, a titania gel, or a titania sol-gel mixture is heat treated in a closed vessel under pressure, and the treated product is then dispersed/stirred to produce anatase titanium oxide slurry.

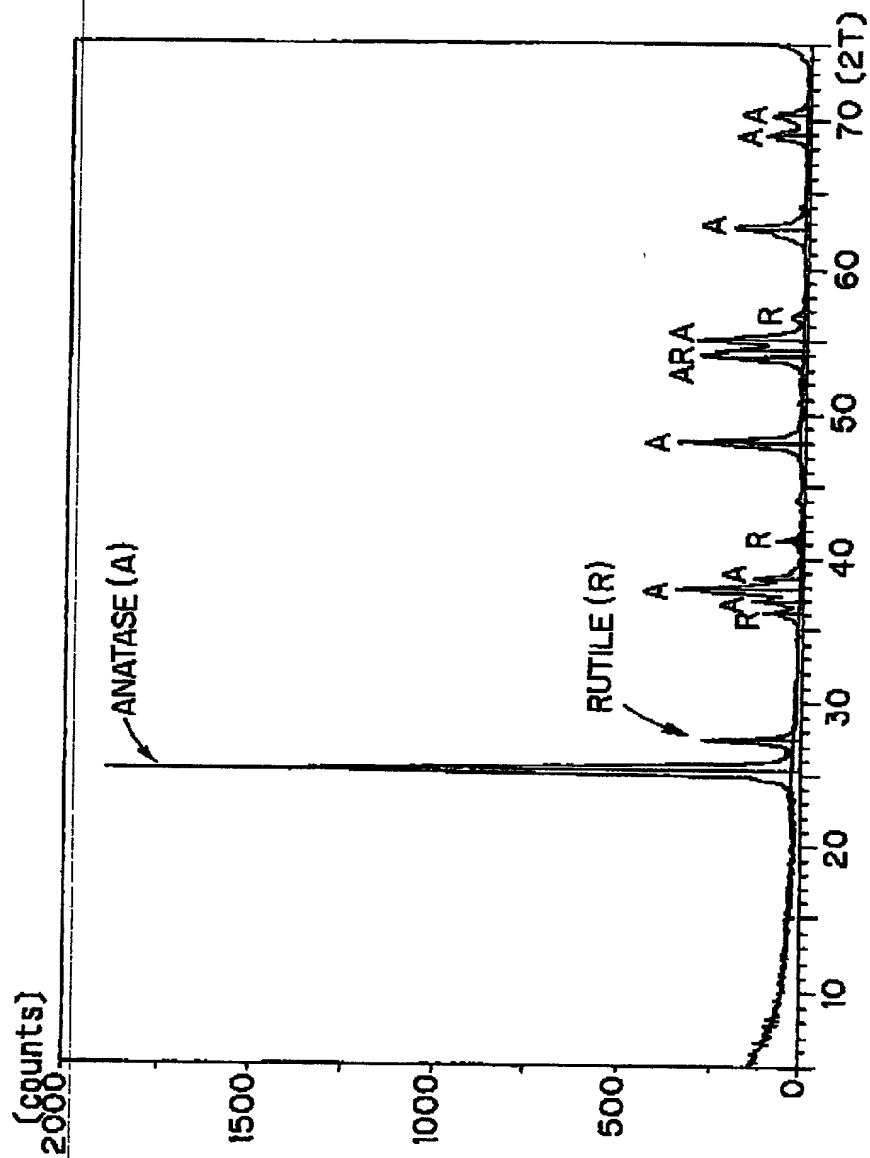


FIG. 1

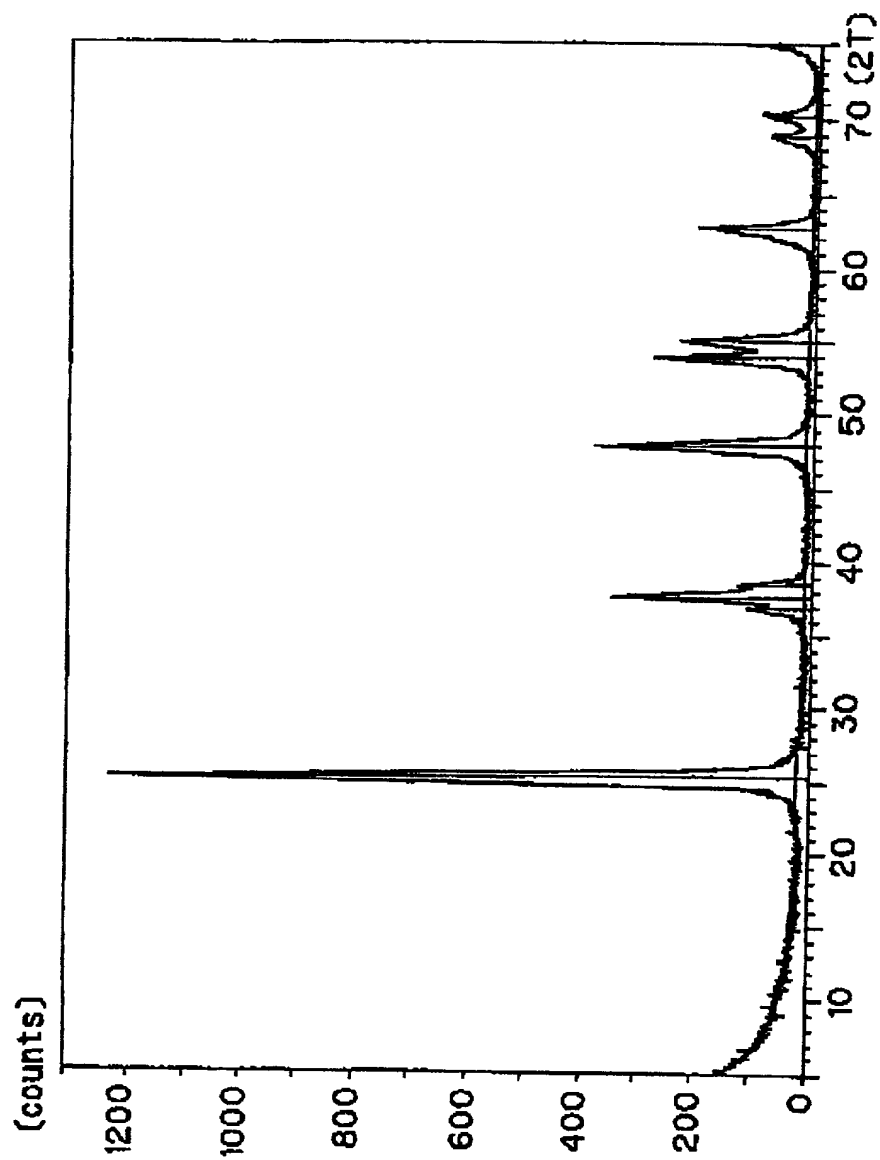


FIG. 2

3/14

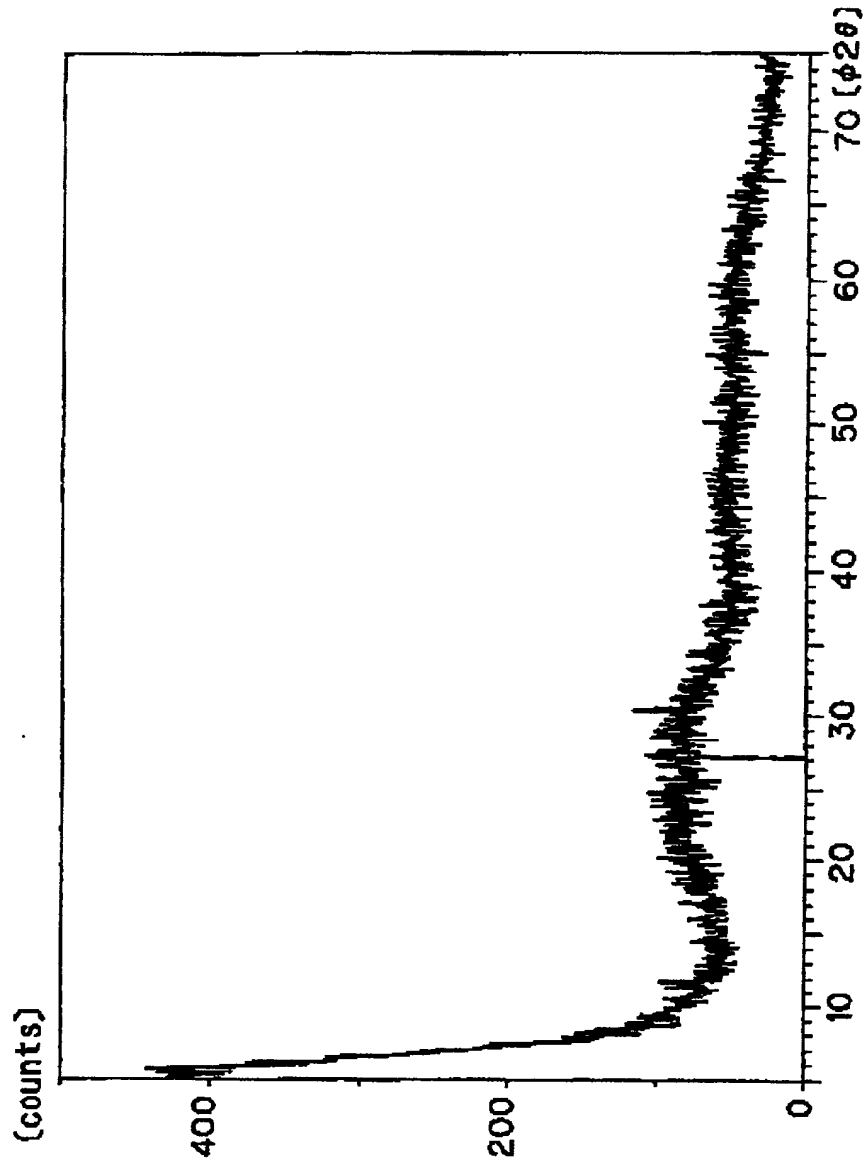


FIG. 3

4/14

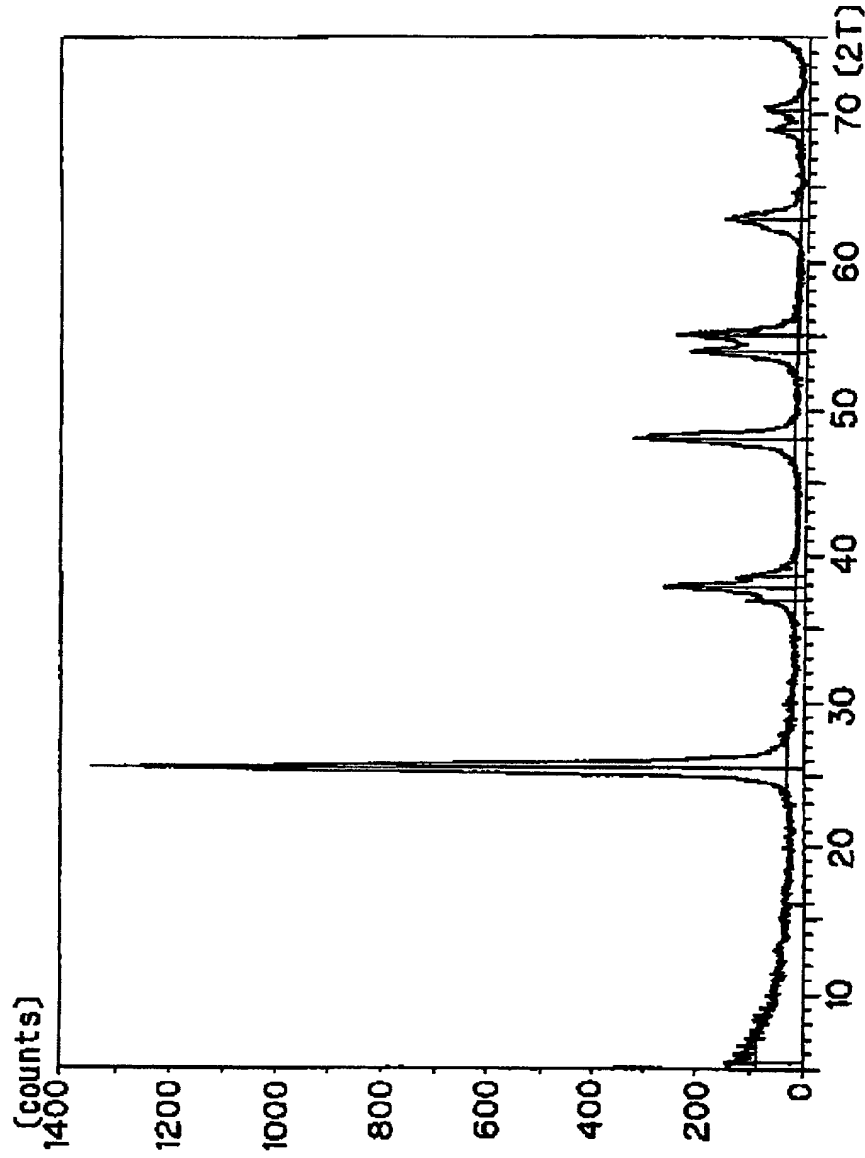


FIG. 4

FIG. 4-206880

5/14

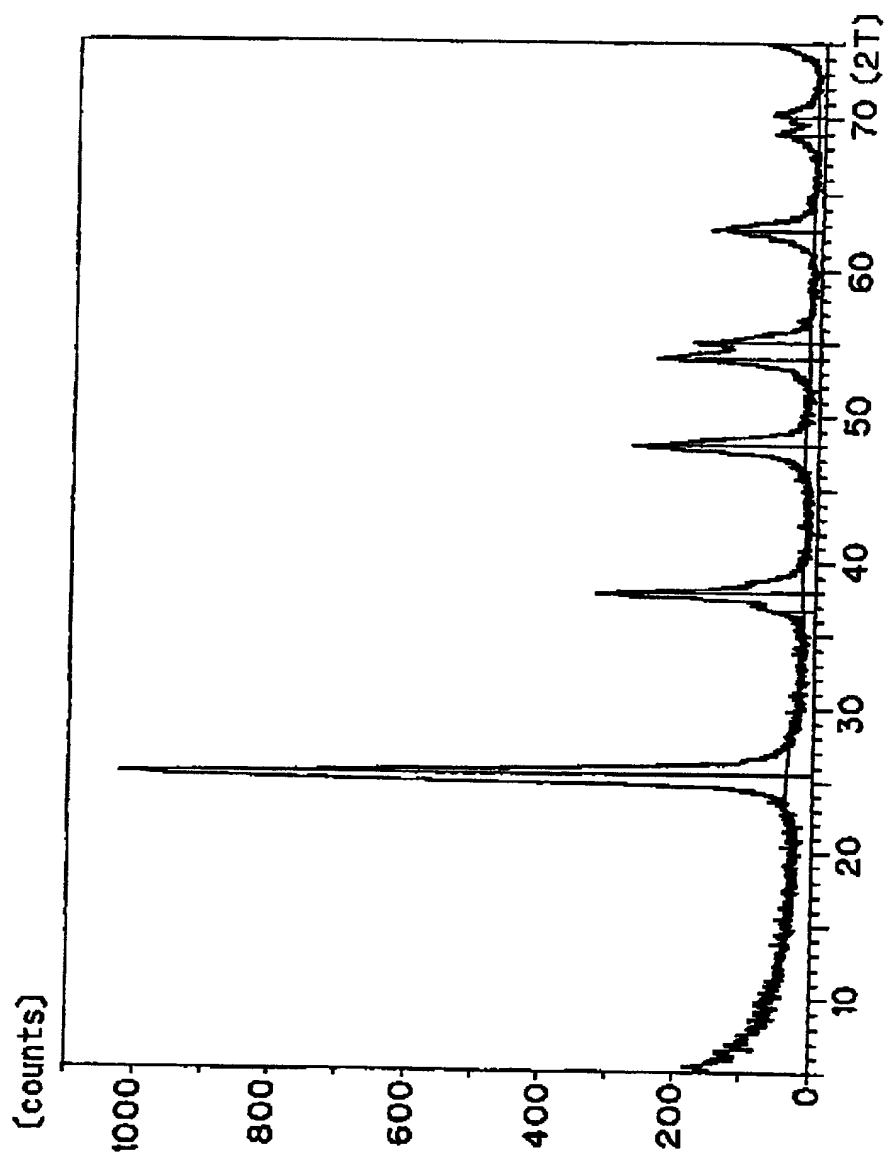


FIG. 5

T09093 03/05/00

6/14

7/14

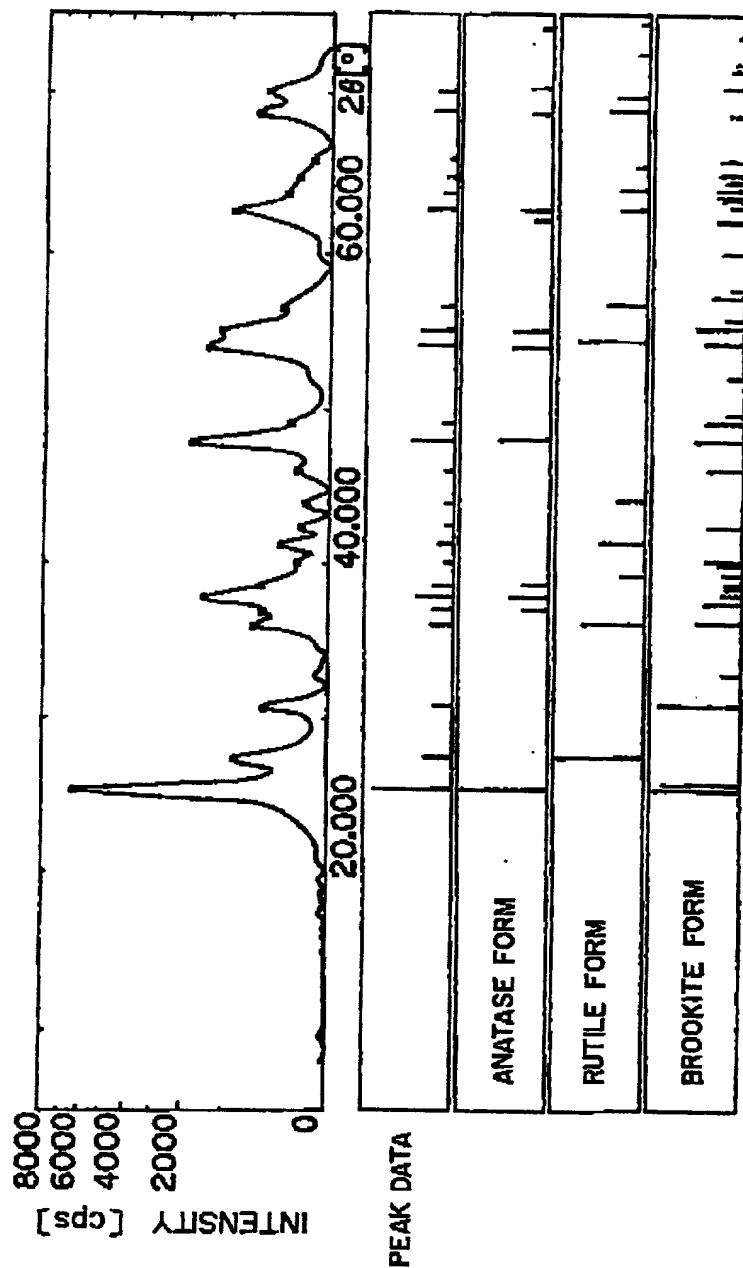


FIG. 7

8/14

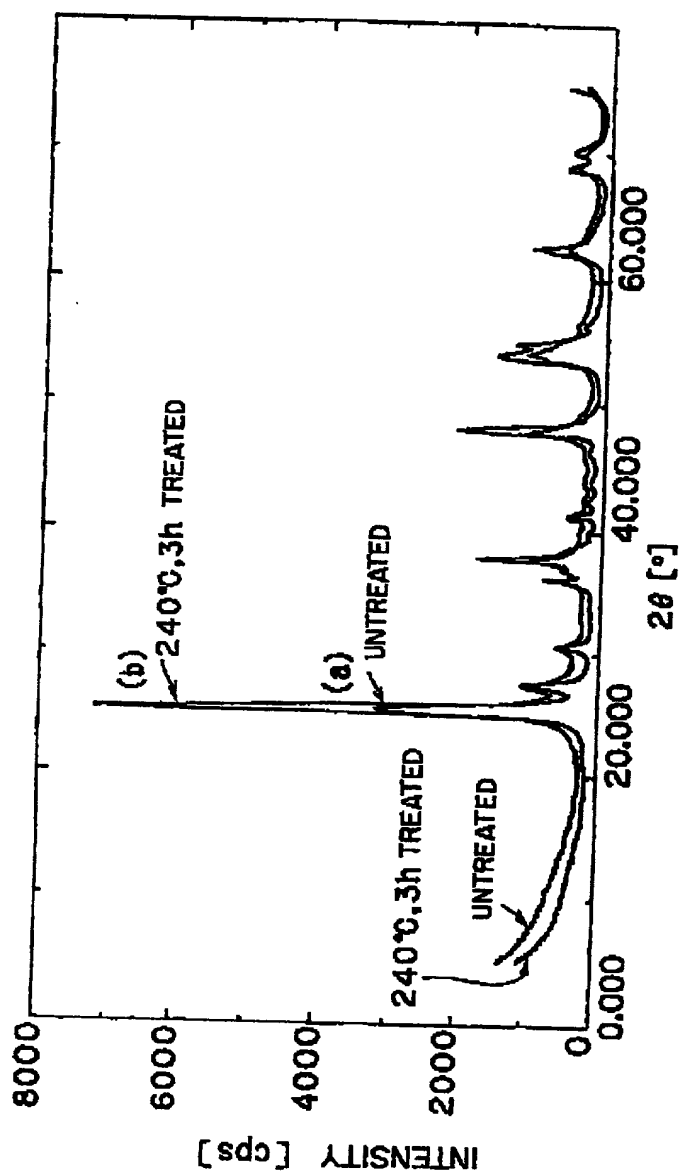


FIG. 8

9/14

09/890768


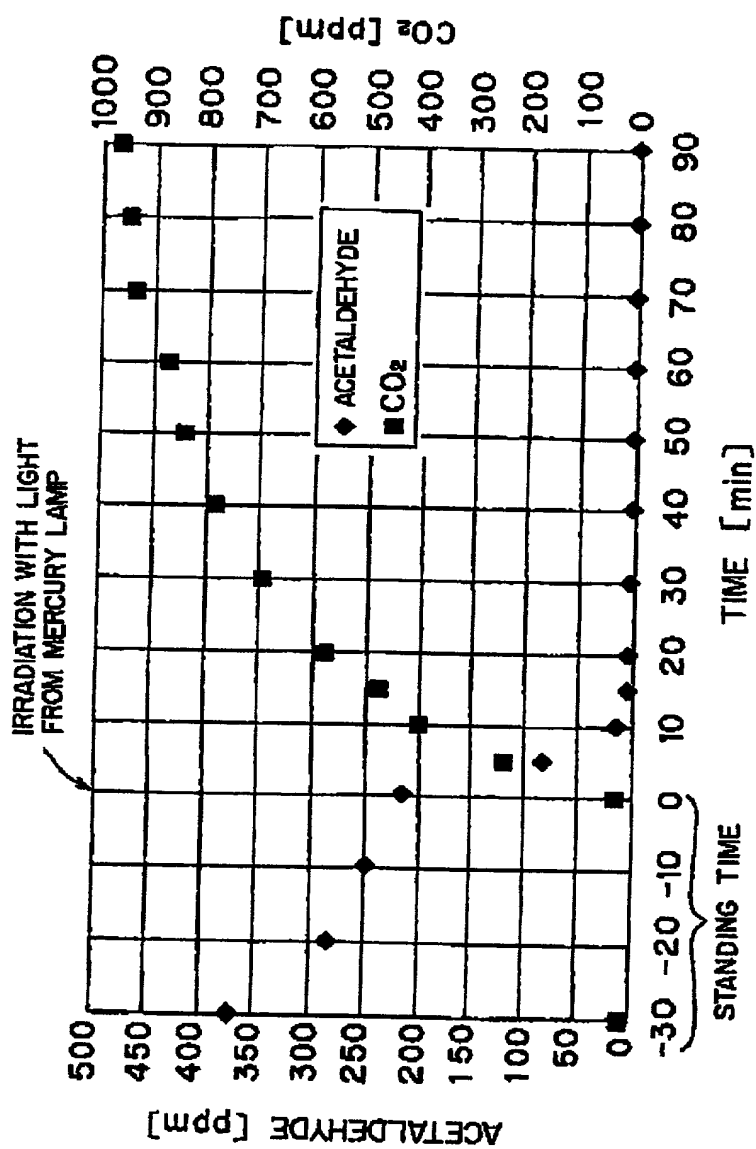


FIG. 9

10/14

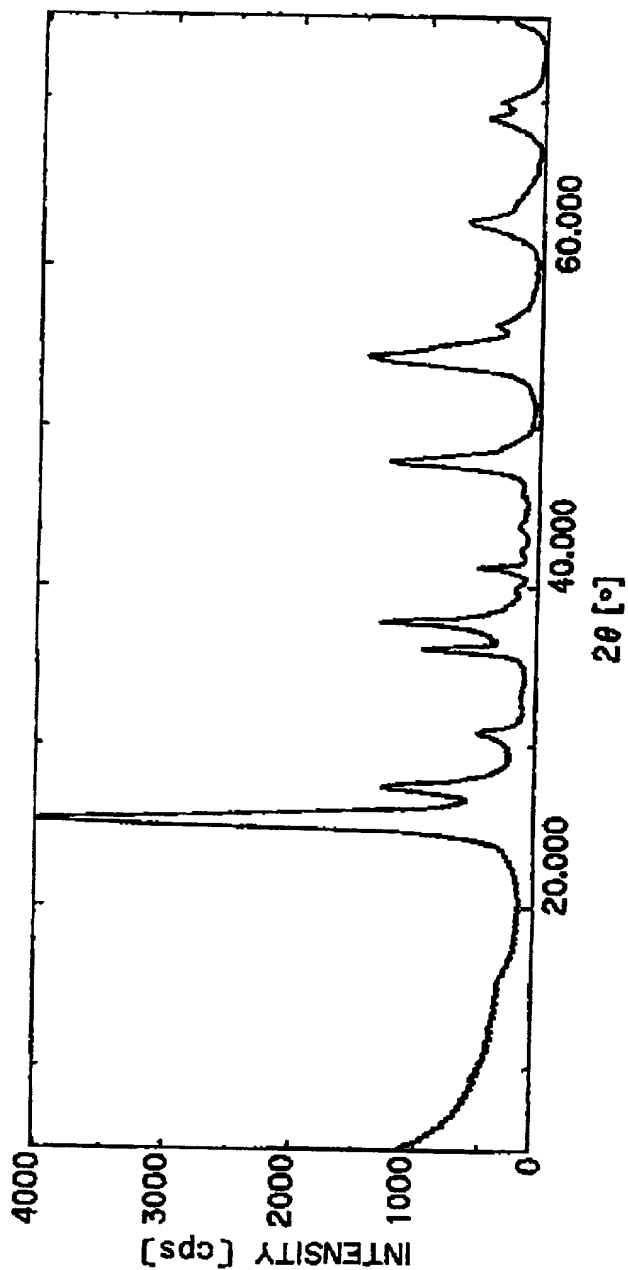

4-6-10

11/14


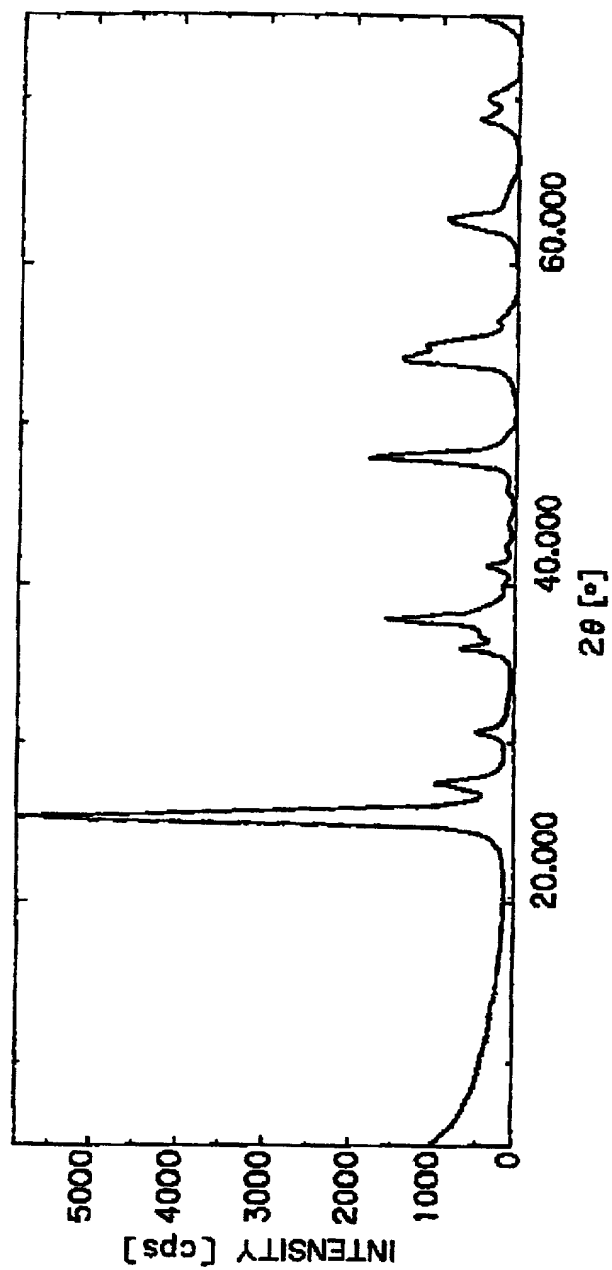


FIG. 11

12/14

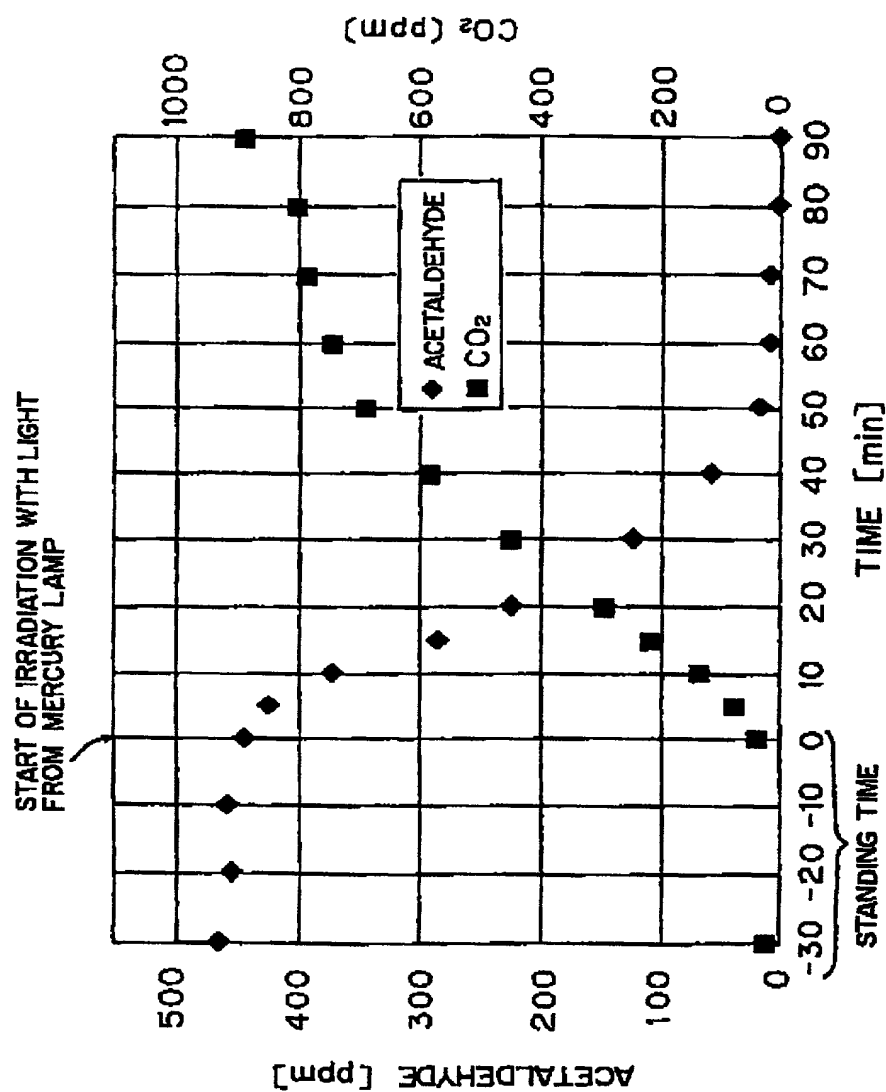

216

13/14

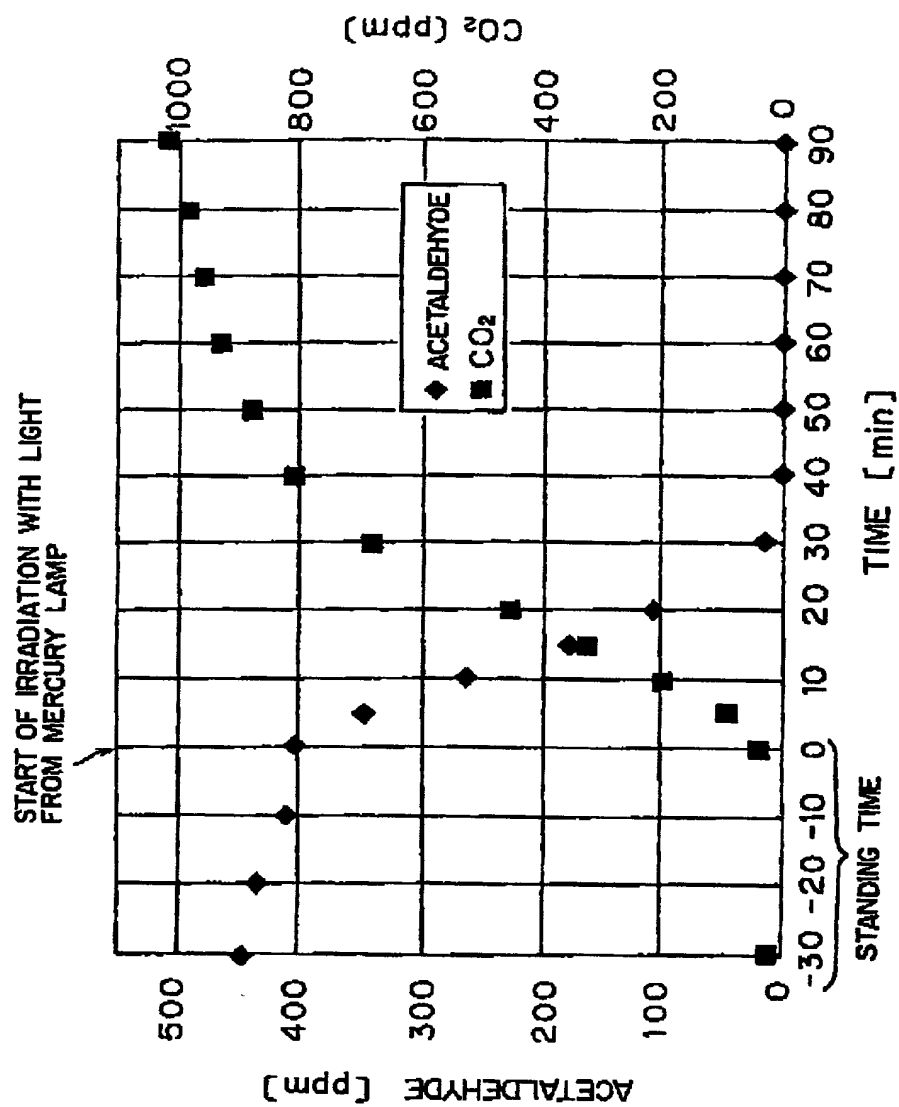


FIG. 13

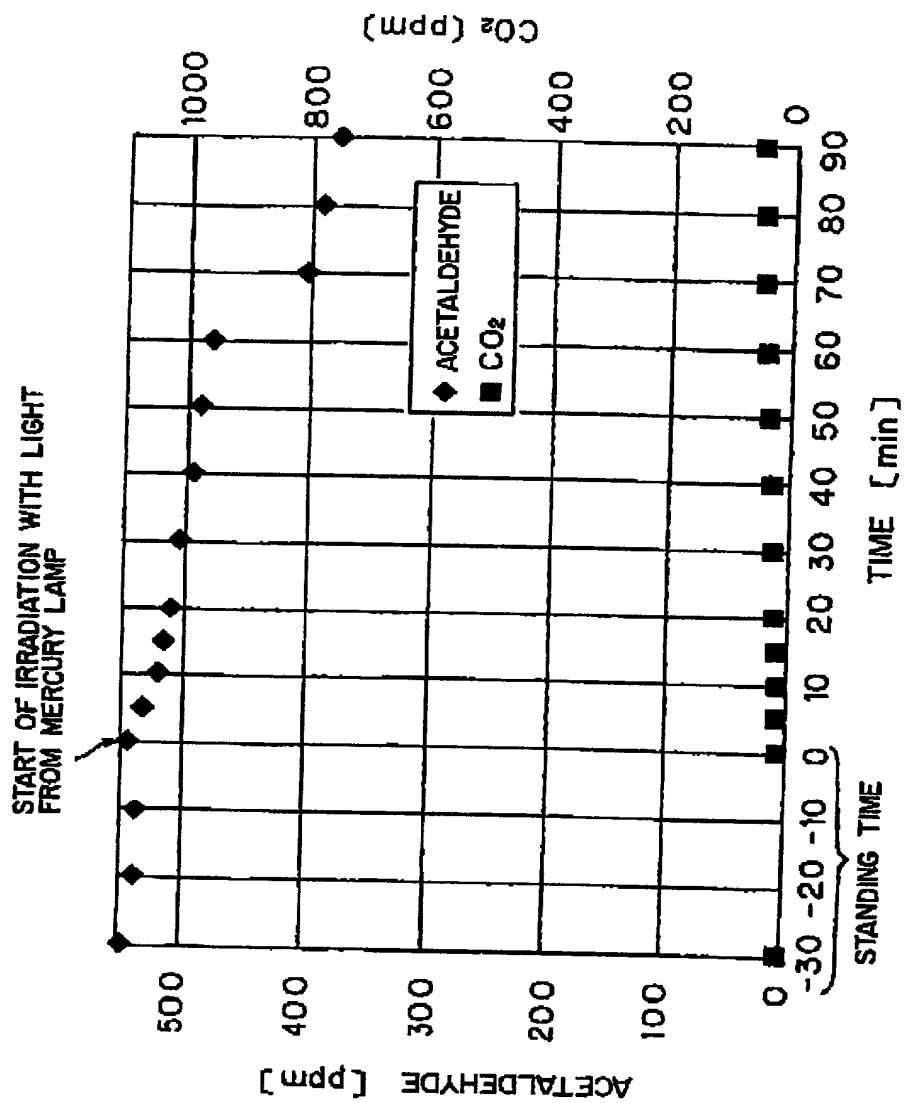


FIG. 14

Attorney's Ref. No.:

Declaration and Power of Attorney For Patent Application

特許出願宣言書及び委任状

Japanese Language Declaration

日本語宣言書

私は、以下に記名された発明者として、ここに下記の通り宣言する:

As a below named inventor, I hereby declare that:

私の住所、郵便の宛先そして国籍は、私の氏名の後に記載された通りである。

My residence, post office address and citizenship are as stated next to my name.

下記の名称の発明について特許請求範囲に記載され、且つ特許が求められている発明主題に関して、私が最初、最先且つ唯一の発明者である（唯一の氏名が記載されている場合）か、或いは最初、最先且つ共同発明者である（複数の氏名が記載されている場合）と信じている。

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled

PROCESSES FOR PRODUCING ANATASE TITANIUM
OXIDE AND TITANIUM OXIDE COATING MATERIAL

上記発明の明細書はここに添付されているが、下記の欄がチェックされている場合は、この限りでない:

the specification of which is attached hereto unless the following box is checked:

☐ の日に出願され、

☒ was filed on June 30, 1999
as United States Application Number or
PCT International Application Number
PCT/JP99/03528 and was amended on
(if applicable).

この出願の米国出願番号または PCT 出願番号は、

であり、且つ、
の日に訂正された出願（該当する場合）

私は、上記の補正書によって補正された、特許請求範囲を含む上記明細書を検討し、且つ内容を理解していることをここに表明する。

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

私は、連邦規則法典第 37 編規則 1.56 に定義されている、特許性について重要な情報を開示する義務があることを認める。

I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56.

Burden Hour Statement: This form is estimated to take 0.4 hours to complete. Time will vary depending upon the needs of the individual case. Any comments on the amount of time you are required to complete this form should be sent to the Chief Information Officer, Patent and Trademark Office, Washington, DC 20231. DO NOT SEND FEES OR COMPLETED FORMS TO THIS ADDRESS. SEND TO: Commissioner of Patents and Trademarks, Washington, DC 20231

Japanese Language Declaration

(日本語宣言書)

私は、ここに、以下に記載した外国での特許出願または発明者証の出願、或いは米国以外の少なくとも一國を指定している米国法典第35編第365条(a)によるPCT国際出願について、同第119条(a)-(d)項又は第365条(b)項に基づいて優先権を主張するとともに、優先権を主張する本出願の出願日より前の出願日を有する外国での特許出願または発明者証の出願、或いはPCT国際出願については、いかなる出願も、下記の枠内をチェックすることにより示した。

I hereby claim foreign priority under Title 35, United States Code, Section 119 (a)-(d) or 365(b) of any foreign application(s) for patent or inventor's certificate, or 365(a) of any PCT International application which designated at least one country other than the United States, listed below and have also identified below, by checking the box, any foreign application for patent or inventor's certificate, or PCT International application having a filing date before that of the application on which priority is claimed.

外国での先行出願/Prior Foreign Application(s)

(番号) / (Number)	(国名) / (Country)	(出願年月日) / (Day/Month/Year Filed)
11-027008	Japan	4/February/1998
11-035358	Japan	15/February/1998
10-142008	Japan	25/May/1998

Priority Not Claimed

優先権主張なし

☐
☐
☒
☐
☐
☐
☐

私は、ここに、下記のいかなる米国仮特許出願についても、その米国法典第35編119条(e)項の利益を主張する。

I hereby claim the benefit under Title 35, United States Code, Section 119 (e) of any United States provisional application(s) listed below.

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

私は、ここに、下記のいかなる米国出願についても、その米国法典第35編第120条に基づく利益を主張し、又米国を指定するいかなるPCT国際出願についても、その同第365条(c)に基づく利益を主張する。また、本出願の各特許請求の範囲の主題が米国法典第35編第112条第1段に規定された態様で、先行する米国特許出願又はPCT国際出願に開示されていない場合においては、その先行出願の出願日と本国内出願日またはPCT国際出願日との間の期間中に入手された情報で、連邦規則法典第37編規則1.56に定義された特許性に關わる重要な情報について開示義務があることを承認する。

I hereby claim the benefit under Title 35, United States Code, Section 120 of any United States application(s), or 365 (c) of any PCT International application designating the United States, listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States or PCT International application in the manner provided by the first paragraph of Title 35, United States Code, Section 112, I acknowledge the duty to disclose information which is material to patentability as defined in Title 37, Code of Federal Regulations, Section 1.56 which became available between the filing date of the prior application and the national or PCT International filing date of application:

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

(Application No.)
(出願番号)

(Filing Date)
(出願日)

(Status: Patented, Pending, Abandoned)
(現況: 特許許可済、係属中、放棄済)

私は、ここに表明された私自身の知識に係わる陳述が真実であり、且つ情報と信ずることに基づく陳述が、真実であると信じられることを宣言し、さらに、故意に虚偽の陳述などを行った場合は、米国法典第18編第1001条に基づき、罰金または拘禁、若しくはその両方により処罰され、またそのような故意による虚偽の陳述は、本出願またはそれに対して発行されるいかなる特許も、その有効性に問題が生ずることを理解した上で陳述が行われたことを、ここに宣言する。

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Under the Paperwork Reduction Act of 1995, no persons are required to respond to collection of information unless it displays a valid OMB control number.

Japanese Language Declaration (日本語宣言書)

委任状： 私は本出願を審査する手続を行い、且つ米国特許商標庁との全ての業務を遂行するために、記名された発明者として、下記の弁護士及び/または弁理士を任命する。(氏名及び登録番号を記載すること)

James A. Oliff, (Reg. 27,075) William P. Berridge, (Reg. 30,024)
Kirk M. Hudson, (Reg. 27,562)
Thomas J. Pardini, (Reg. 30,411)

POWER OF ATTORNEY: As a named inventor, I hereby appoint the following attorney(s) and/or agent(s) to prosecute this application and transact all business in the Patent and Trademark Office connected therewith. (list name and registration number)

Edward P. Waker, (Reg. 31,450) Robert A. Miller, (Reg. 32,771)
Mario A. Costantino, (Reg. 33,565)
Caroline D. Dennison, (Reg. 34,484)

書類送付先:

Send Correspondence to:

OLIFF & BERRIDGE, PLC,
P.O. Box 19928 Alexandria,
Virginia 22320 U.S.A.

直接電話連絡先: (名前及び電話番号)

Direct Telephone Calls to: (name and telephone number)

OLIFF & BERRIDGE, PLC
(703) 836-6400

唯一または第一発明者名

Full name of sole or first inventor

Tatsuya Imura

発明者の署名

日付

Inventor's signature

Date

Tatsuya Imura

July 26, 2001

住所

日本国

Residence

Osaka-Shi, Osaka-Fu, Japan

国籍

日本

Citizenship

Japan

JPX

私書箱

Post Office Address

3-9-8, Minami-Sumiyoshi, Sumiyoshi-Ku, Osaka-Shi, Osaka-Fu, Japan

第二共同発明者

Full name of second joint inventor, if any

Seiji Terada

第二共同発明者の署名

日付

Second inventor's signature

Date

Seiji Terada

July 26, 2001

住所

日本国

Residence

Kobe-Shi, Hyogo-Ken, Japan

国籍

日本

Citizenship

Japan

JPX

私書箱

Post Office Address

3-23-6, Kitayamadai, Nishi-Ku, Kobe-Shi, Hyogo-Ken, Japan

(第三以降の共同発明者についても同様に記載し、署名をすること)

(Supply similar information and signature for third and subsequent joint inventors.)